

SFMC 250 series

Flow rate up to 160 l/min



SFMC 250 GENERAL INFORMATION

Description

Suction filters

Flow rate up to 160 l/min

SFMC 250 is a range of suction filters with integrated shut-off valve for protection of the downstream pump against the coarse contamination.

They are placed below the minimum oil level, directly connected to the suction line of the pump.

They can be fitted on the side or below the tank, allowing a more flexible design of the tank.

The shut-off valve closes automatically when the cover is removed, allowing the filter element replacement without the fluid drop.

Available features:

- Female threaded connections up to 1" and flanged connections up to 1 1/2", for a maximum flow rate of 160 l/min
- Multiple connections, to connect several suction lines
- Bypass valve, to relieve excessive pressure drop across the filter media
- Magnetic filter, to hold the ferrous particles
- Visual, electrical and electronic clogging indicators

Common application:

- Mobile machines
- Industrial equipment

Technical data

Filter housing materials

- Filter body: Aluminium
- Cover: Polyamide, GF reinforced
- Valve: Polyamide, GF reinforced - Steel
- Anti-Emptying valve: Steel

Bypass valve

Opening pressure 30 kPa (0.3 bar) $\pm 10\%$

Elements

Fluid flow through the filter element from IN to OUT

Seals

- Standard NBR series A or W
- Optional FPM series V or Z

Temperature

From -25 °C to +110 °C

Note

SFMC 250 filters mounting, see the drawings on page 54 and following.

Weights [kg] and volumes [dm³]

Filter series	Weights [kg]	Volumes [dm ³]
SFMC 250	2.8	2.3
SFMC 250	2.8	2.4

Flow rates [l/min]

Filter series	Filter element design - N Series					
	M0025	M0060	M0090	M0250	P0010	P0025
SFMC 250	147	151	155	160	85	132

Maximum flow rate for a complete suction filter with a pressure drop $\Delta p = 0.08$ bar.





The reference fluid has a kinematic viscosity of 30 mm²/s (cSt) and a density of 0.86 kg/dm³.

For different pressure drop or fluid viscosity we recommend to use our selection software available on www.mpfiltri.com.

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.


Hydraulic symbols

Filter series	0 - without additional connections	1 - with smaller additional connections	0 - without additional connections	1 - with smaller additional connections
SFMC 250 without bypass	•	•	-	-
SFMC 250 with bypass	-	-	•	•







Pressure drop

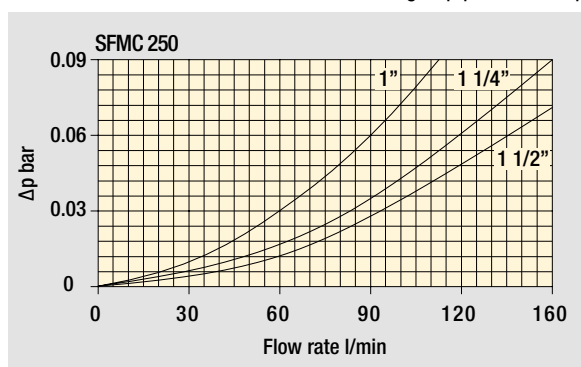Filter housings Δp pressure drop

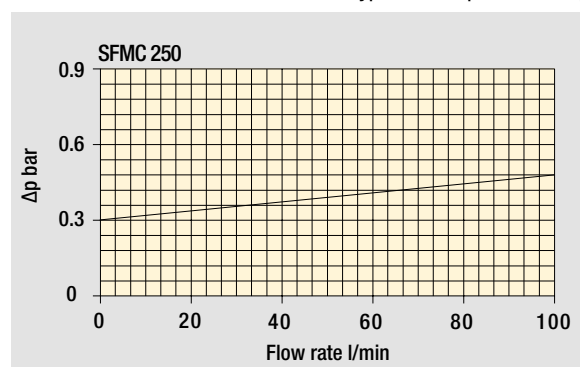

Bypass valve pressure drop



The curves are plotted using mineral oil with density of 0.86 kg/dm³ in compliance with ISO 3968. Δp varies proportionally with density.

Corrective factors "Y" for filter element Δp calculation

Filter element		Nominal filtration Collapse ΔP : A = 1 bar					
Type	Length	P0010	P0025	M0025	M0060	M0090	M0250
SMC 250	10	0.65	0.20	0.10	0.08	0.05	0.03

See page 22 for the complete information regarding filter element Δp calculation.

Maximum total pressure drop (Δp max) allowed by a new and clean filter

Filter family	Δp max	
Suction	0.08 bar	1.15 psi

SFMC 250

Designation & Ordering code

COMPLETE FILTER

Series	Example 1:	SFMC	250	10	M0025	A	A	00	FF112	0	5T	MA	P01	NN
SFMC	Example 2:	SFMC	250	10	P0010	A	V	00	FG112	0	5T	NN	P01	NN

Size	
250	

Length	
10	

Filtration rating (filter media)	
M0025 Wire mesh 25 µm	P0010 Resin-impregnated paper 10 µm
M0060 Wire mesh 60 µm	P0025 Resin-impregnated paper 25 µm
M0090 Wire mesh 90 µm	
M0250 Wire mesh 250 µm	

Element Δp	
A 1 bar	

Seals and treatments	M0xxx	P0xxx
A NBR	•	•
V FPM	•	•
W NBR with filter housing and components surface treatment	•	-
Z FPM with filter housing and components surface treatment	•	-

Bypass	
00 Without bypass	
03 With bypass 30 kPa (0.3 bar)	

Connections	
FG100 G 1"	FS016 SAE 16 - 1 5/16" - 12 UN
FG114 G 1 1/4"	FS020 SAE 20 - 1 5/8" - 12 UN
FG112 G 1 1/2" G 1"	FS024 SAE 24 - 1 7/8" - 12 UN SAE 16 - 1 5/16" - 12 UN
FN100 1" NPT	FE112 1 1/2" SAE 3000 psi/M
FN114 1 1/4" NPT	FF112 1 1/2" SAE 3000 psi/UNC
FN112 1 1/2" NPT	Available additional connections

Additional connections	FG112	FS024
0 Without additional connections	-	-
1 With smaller additional connections	G1"	SAE 16 - 1 5/16" - 12 UN

Connections for clogging indicators	
5T With rear indicator connection, with metal plugs	

Additional features	
NN Without additional features	
MA With magnetic filter	

Version	
P01 Standard catalogue item	

Certificates	
NN None	

CLOGGING INDICATORS

See page 719

VEA Electrical vacuum indicator

VVA Axial vacuum gauge



VLA Electrical / visual vacuum indicator

VVR Radial vacuum gauge

FILTER ELEMENT											
Series	Example 1: SMC 250 10 M0025 A A 00 NN P01 NN										
SMC	Example 2: SMC 250 10 P0010 A V 00 NN P01 NN										
Size											
250											
Length											
10											
Filtration rating (filter media)											
M0025 Wire mesh 25 µm	P0010 Resin-impregnated paper 10 µm										
M0060 Wire mesh 60 µm	P0025 Resin-impregnated paper 25 µm										
M0090 Wire mesh 90 µm											
M0250 Wire mesh 250 µm											
Element Δp											
A 1 bar											
Seals and treatments											
A NBR											
V FPM											
Bypass											
00 Without bypass											
Additional features											
NN Without											
Version											
P01 Standard catalogue item											
Certificates											
NN None											


SFMC 250

Dimensions

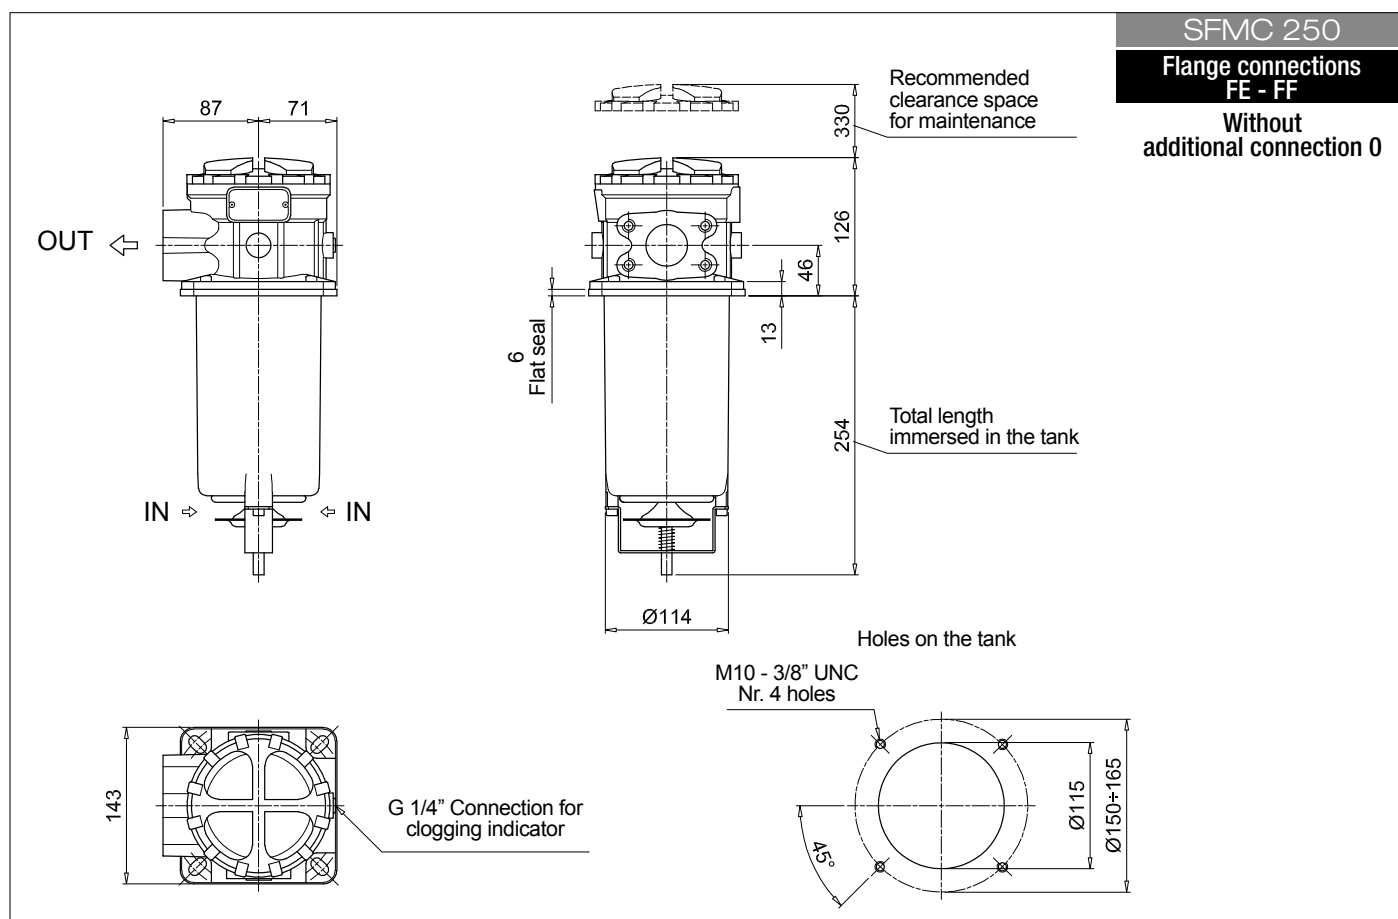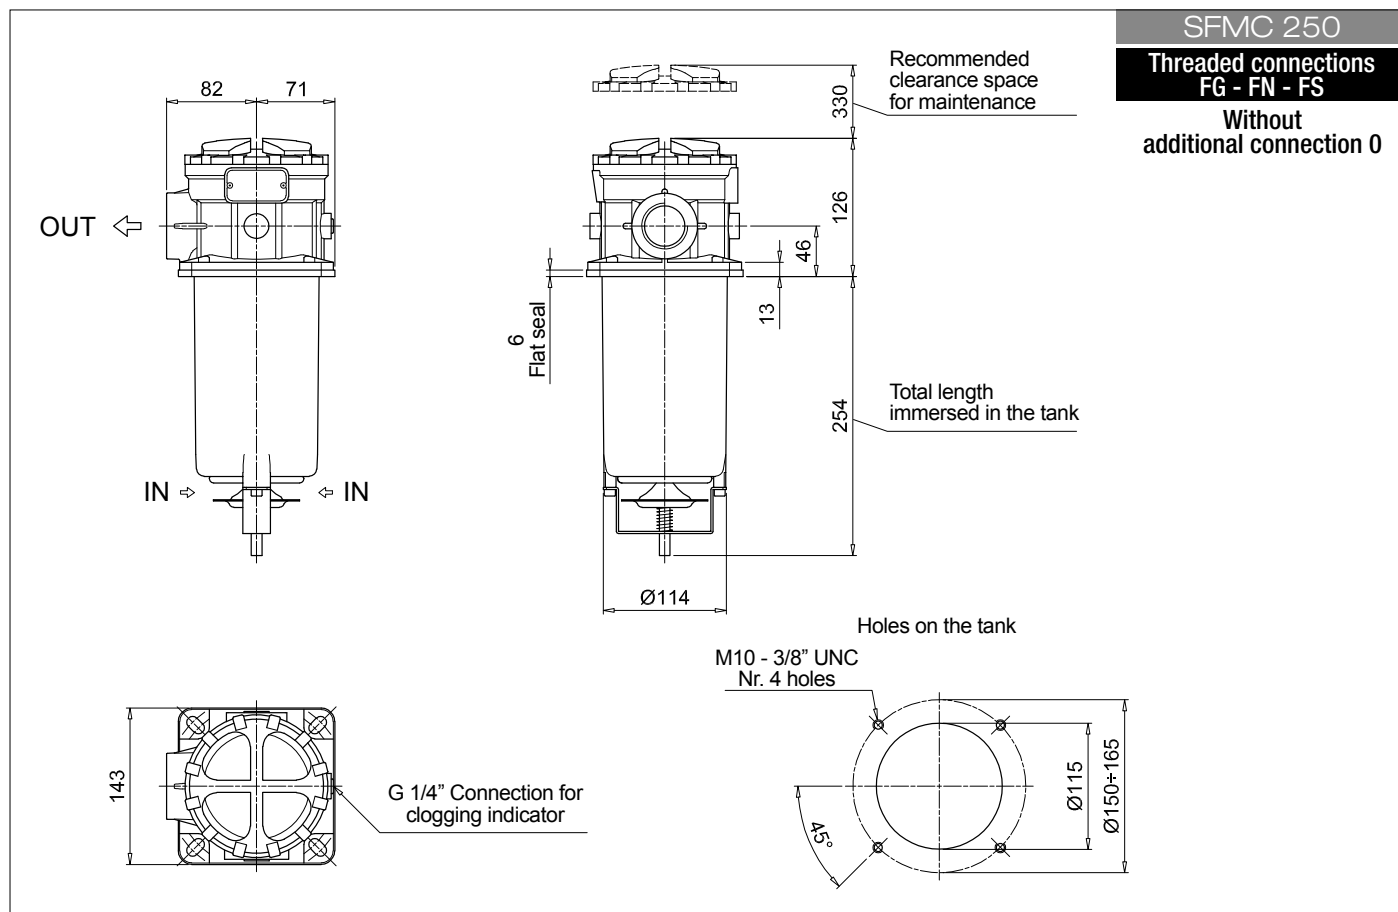

SFMC 250


With
smaller additional
connection 1

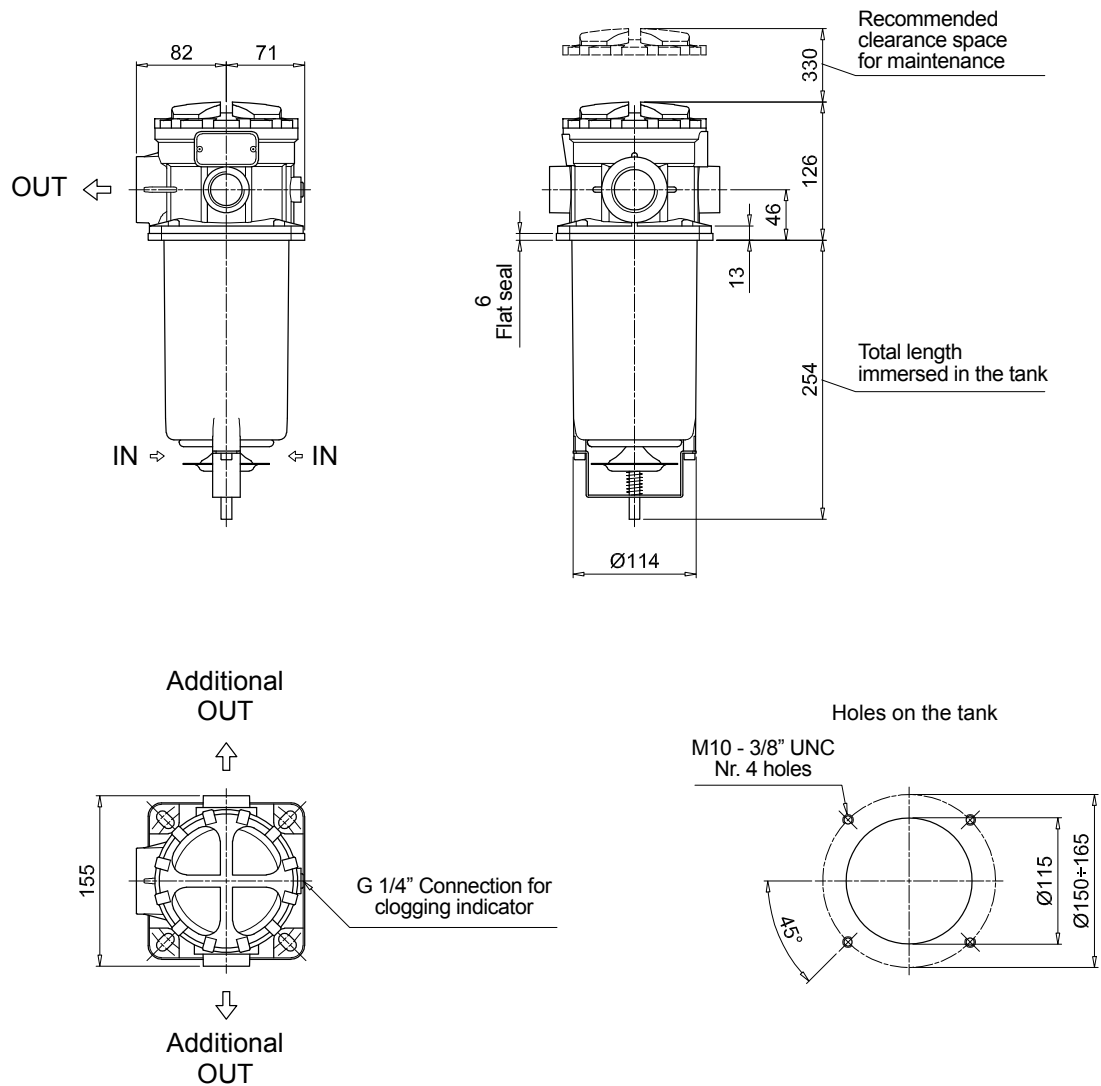

SFMC 250 SPARE PARTS

Order number for spare parts

SFMC 250

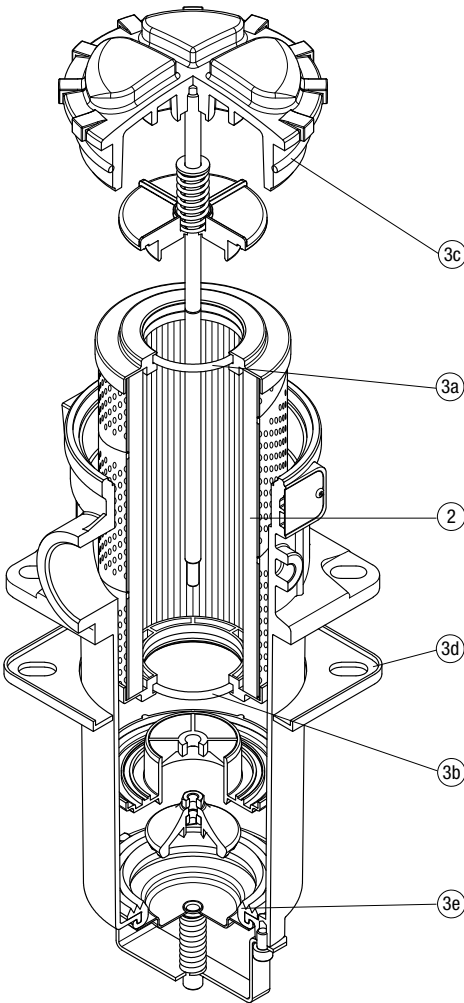

Q.ty: 1 pc.		Q.ty: 1 pc.	
Item:	2	3	(3a ÷ 3e)
Filter series	Filter element	Seal Kit code number	
		NBR	FPM
SFMC 250	See order table	02050586	02050587

Designation & Ordering code

VACUUM INDICATORS											
Series		Configuration example 1:									
VE Electrical vacuum indicator		VE	A	21	V	A	50	P01	EX		
VL Electrical/Visual vacuum indicator		Configuration example 2:									
VV Vacuum gauge		VL	B	21	A	A	71	P01			
		Configuration example 3:									
		VV	R	20	P01						
Type VE - VL		Type VV		SFC	SFEX						
A Connection EN 10226 - R1/4"		A Axial connection EN 10226 - R1/4"		•	-						
B Connection EN 10226 - R1/8"		B Axial connection EN 10226 - R1/8"		-	•						
		R Radial connection EN 10226 - R1/4"		•	-						
		S Radial connection EN 10226 - R1/8"		-	•						
Vacuum setting				VE	VL	VV					
20 -0.16 bar				-	-	•					
21 -0.21 bar				•	•	-					
Seals				VEA - VLA		VEB - VLB					
A NBR				•		•					
V FPM				•		-					
Thermostat				VE	VL						
A Without				•	•						
Electrical connections				VE	VL						
50 Connection EN 175301-803				•	-						
51 Connection EN 175301-803, transparent base with lamps 24 Vdc				-	•						
52 Connection EN 175301-803, transparent base with lamps 110 Vdc				-	•						
53 Connection EN 175301-803, transparent base with lamps 230 Vac				-	•						
71 Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc				-	•						
				Option							
				P01 MP Filtri standard							
				Pxx Customized							
Certifications				VEA21A	VEA21V	VEB	VL	VV			
Without				•	•	•	•	•			
EX ATEX certification				•	•	•	-	-			
UL UL certification				•	-	-	-	-			