

Mobile Trolleys

Mobile Filtration Units

Available with a flow rate up to 50 l/min



PASSION TO PERFORM



System Cleaning Requirements

Typical Hydraulic Applications	Cleanliness Class Required		Outlet Filter Required	
Component Types	ISO4406	NAS1638	Type	Element Types
High-precision and laboratory servo-systems	14/12/9	3	3 Micron absolute	A03
Robotic and servo-systems	17/15/11	6	3-6 Micron absolute	A03, A06
Very sensitive high-reliability systems	18/16/13	7	10-12 Micron absolute	A10, A16
Sensitive, reliable systems	20/18/14	9	12-15 Micron absolute	A10, A16
General equipment	21/19/16	10	15-25 Micron absolute	A16, A25
Low pressure equipment not in continuous use	23/21/18	12	25-40 Micron absolute	A25

Approximate System Cleaning Times

GRF 100								
Reservoir Capacity (litres)	100	200						
Cleaning time (mins/hours)	1hr	2hrs						
GRF 261								
Reservoir Capacity (litres)	100	200	400					
Cleaning time (mins/hours)	30mins	45mins	1hr 30mins					
GRF / GRM 302								
Reservoir Capacity (litres)	100	200	400	600				
Cleaning time (mins/hours)	20mins	40mins	1hr 20mins	2hrs				
GRF / GRM 503								
Reservoir Capacity (litres)		200	400	600	800	1000	1200	1500
Cleaning time (mins/hours)		30mins	45mins	1hr	1hr 15mins	2hrs	3hrs 30mins	4hrs 30mins

Clean-up rates based on an initial contamination rating of ISO 4406 23/21/19 (NAS 1638 Class 12) to 17/15/12 (NAS Class 6) Using MTD - Please note more than one element might be required

Filter Options

Type	Description	Nominal Water Removal Spin-on CW100	Nominal Water Removal Spin-on CW150	Nominal and Absolute Spin-on CS100	Nominal and Absolute Spin-on CS150	Absolute LMP Length 5 Element CU4005	Absolute LMP Length 1 Element CU2101
GRF100	10 lpm hand held	•	•	•	•		
GRF261	26 lpm hand held	•	•	•	•		
GRF/GRM302	30 lpm sack truck	•	•	•	•		
GRF/GRM302 (L4305)	30 lpm high DHC					•	
GRF/GRM302 (SP L4305)	30 lpm high DHC with additional spin-ons	•	•	•	•	•	
GRF/GRM302 SW	30 lpm sack truck - water glycol version						•
GRF/GRM503 (L4305)	50 lpm high DHC					•	
FTU111522	FTU 80l tank, spin on and high DHC	•	•	•	•	•	

MONITOR, CLEAN, PROTECT

- **PROTECTS COMPLEX SYSTEMS AND COMPONENTS**
- **REDUCES COSTS AND DOWNTIME**
- **CRITICAL EARLY WARNING SYSTEM (GRM/FTU)**
- **ENABLES LONGER SERVICE INTERVALS**
- **SPEEDS UP CLEANING TIMES**
- **COMPACT AND PORTABLE**



The data and information contained in this publication are provided only for the purpose of information. MP Filtri reserves the right to make changes to the models and versions of the products described at any time, both for technical and commercial reasons.

The colours and photographs of the products are purely indicative.
Any reproduction, partial or total, of this document is strictly prohibited.
Rights reserved.


Mobile Filtration Unit

Mobile Filtration Unit
Maximum working pressure up to 5 bar
Flow rate up to 10 l/min

A highly portable oil transfer/filtration unit, designed for both filling/transferring hydraulic oils from containers to the hydraulic tank as well as filtering and cleaning hydraulic systems.

The unit utilises Spin-On standard cartridge (supplied as option), available in two lengths, thus increasing the dirt-holding capacity and lowering pressure drop of the unit.

Light and compact, it supports a wide range of medias and micron ratings to suit multiple applications.

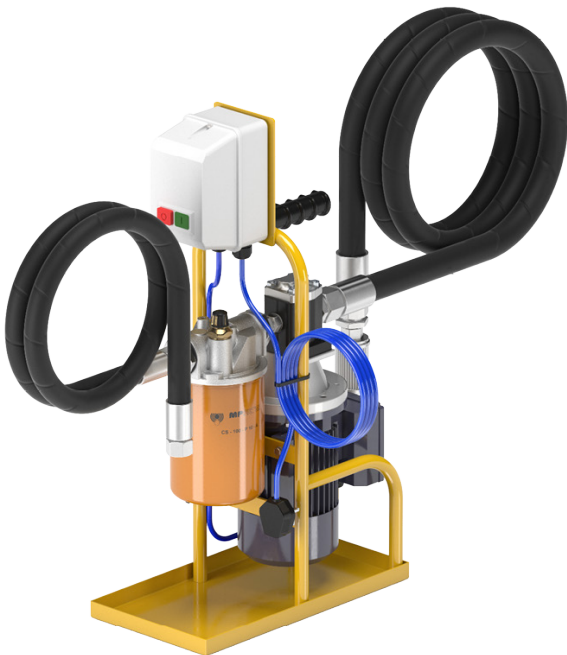

Available features:

- 10 L/min Flow rate
- Continuous operation at 5 bar
- Light and portable
- Compact design
- Quick and easy to set up
- High-efficiency filtration
- Easy to maintain
- Comes with MPS100 filter head filters as standard
- Water removal (optional element)
- Compatible with Mineral Oil
- Electric control box
- Visual indicator
- Nitrile seals

Applications:

- Filling/transferring hydraulic oils from containers to the hydraulic tank
- Filtering and cleaning hydraulic systems.

SPECIFICATION

Pump	Gear Pump
Electric Motor	0.37 Kw 110/230 Volt single phase electric motor
Flow Rate	10 L/min
Max Operating Pressure	5 bar
Viscosity Range	Min. operation 10 cSt Max. operation 120 cSt
Inlet Filter	250 µm metal mesh strainer
Outlet Filter	1/3/6/10/25 µm β>1000 flow through the element Out/In
Bypass Indicator set at 1.75bar	Visual clogging indicator gauge - pop-up manual reset.
Fluid Temperature	From 0° to +80°C
Ambient Temperature	From 0° to +45°C
Protection Class	IP 55
Seal	NBR
Fluid Compatibility	Mineral oil
Suction / pressure hose	SAE100R4 1" swaged female 2000mm hose SAE100R4 3/4" swaged female 2000mm hose
Dimensions	Weight: 18kg Dimensions: 697mm (H); 400mm (D); 215mm(W)
Equipment	N/A

How to order

GRF100

Order example	GRF	10	0	1	M90	S
1. Model GRF= GRF Mobile Filtration Trolley						
2. Flow 10= 10 L/min						
3. Electric Power 0= 0.37kW						
4. Electric Motor 1= 110v single phase 2= 240v single phase						
5. Replacement Suction Element M90= 250um suction strainer						
6. Filtration S= No filter fitted, to be ordered separately						

Spin-on Filters

Filter element - Standard length: Inorganic microfiber element

CS 100 A01 A P01	1 µm absolute
CS 100 A03 A P01	3 µm absolute
CS 100 A06 A P01	6 µm absolute
CS 100 A10 A P01	10 µm absolute
CS 100 A25 A P01	25 µm absolute

Filter element - Standard length: Wire-mesh element

CS 100 M25 A P01	25 µm
CS 100 M60 A P01	60 µm

Filter element - Extended length: Inorganic microfiber element

CS 150 A01 A P01	1 µm absolute
CS 150 A03 A P01	3 µm absolute
CS 150 A06 A P01	6 µm absolute
CS 150 A10 A P01	10 µm absolute
CS 150 A25 A P01	25 µm absolute

Filter element - Extended length: Wire-mesh element

CS 150 M25 A P01	25 µm
CS 150 M60 A P01	60 µm

Mobile Filtration Unit

Mobile Filtration Unit
Maximum working pressure up to 5 bar
Flow rate up to 26 l/min

GRF 261 mobile filtration units have been created for filling and refilling filtered hydraulic fluids and lubrication tanks.

The filter unit connected to off-line to the tank (recommended maximum volume 400L), can be used as a support to the filtration plant on start-up for fast flushing action, or as additional filtration for systems with a high incidence of contamination.

Light and compact, it supports a wide range of medias and micron ratings to suit multiple applications.

Available features:

- 26 L/min Flow rate
- Continuous operation at 5 bar
- Light and portable
- Fast clean-up times
- Compact design
- Quick and easy to set up
- High-efficiency filtration
- Easy to maintain
- Comes with MPS100 filter head filters as standard
- Water removal (optional element)
- Compatible with Mineral Oil
- Electric control box
- Visual indicator
- Nitrile seals

Applications:

- Filling/transferring hydraulic oils from containers to the hydraulic tank
- Filtering and cleaning hydraulic systems.



SPECIFICATION

Pump	Gear Pump
Electric Motor	0.55 Kw 110/230 Volt single phase electric motor
Flow Rate	26 L/min
Max Operating Pressure	5 bar
Viscosity Range	Min. operation 10 cSt Max. operation 120 cSt
Inlet Filter	250 µm metal mesh strainer
Outlet Filter	1/3/6/10/25 µm β>1000 flow through the element Out/In
Bypass Indicator set at 1.75bar	Visual clogging indicator gauge pop-up, manual reset.
Fluid Temperature	From 0° to +80°C
Ambient Temperature	From 0° to +45°C
Protection Class	IP 55
Seal	NBR
Fluid Compatibility	Mineral oil
Suction / Pressure hose	SAE100R4 1" swaged female 2000mm hose SAE100R4 3/4" swaged female 2000mm hose
Dimensions	Weight: 18kg Dimensions: 697mm (H); 400mm (D); 215mm(W)
Equipment	N/A

How to order

GRF261

Order example	GRF	26	1	1	M250	S
1. Model GRF= GRF Mobile Filtration Trolley						
2. Flow 26= 26 L/min						
3. Electric Power 1= 0.50kW						
4. Electric Motor 1= 110v single phase 2= 240v single phase						
5. Replacement Suction Element M250= 250um suction strainer						
6. Filtration S= No filter fitted, to be ordered seperately						

Spin-on Filters

Filter element - Standard length: Inorganic microfiber element

CS 100 A01 A P01	1 µm absolute
CS 100 A03 A P01	3 µm absolute
CS 100 A06 A P01	6 µm absolute
CS 100 A10 A P01	10 µm absolute
CS 100 A25 A P01	25 µm absolute

Filter element - Standard length: Wire-mesh element

CS 100 M25 A P01	25 µm
CS 100 M60 A P01	60 µm

Filter element - Extended length: Inorganic microfiber element

CS 150 A01 A P01	1 µm absolute
CS 150 A03 A P01	3 µm absolute
CS 150 A06 A P01	6 µm absolute
CS 150 A10 A P01	10 µm absolute
CS 150 A25 A P01	25 µm absolute

Filter element - Extended length: Wire-mesh element

CS 150 M25 A P01	25 µm
CS 150 M60 A P01	60 µm

GRF 302 / GRM 302

Available with ICM 2.0 In-line Contamination Monitor

Mobile Filtration Unit

Mobile Filtration Unit

Maximum working pressure up to 5 bar

Flow rate up to 30 l/min

Compact and simple to use, the GRF and GRM302 mobile filtration units enable service teams to clean oil and hydraulic fluids quickly and easily - protecting complex components, machines and systems from particulate contamination.

GRF/GRM 302 units are ideal for filling and filtering hydraulic fluids and lubrication tanks.

The unit can be connected off-line to the tank (recommended max volume of 500 L), and can be used as a support to the filtration plant on start-up for fast flushing or as an additional filtration system for highly contaminated systems.

Available features:

- 30 L/min Flow rate
- Continuous operation at 3.5 bar
- Compact size
- Comes with MPS100 filter as standard – option for LMP4305 filter to be fitted
- Water removal (optional element)
- Compatible with Mineral Oil
- Electric control box
- Calibrated to relevant ISO standards (GRM only)
- Electric control box
- Visual electrical indicator
- Nitrile seals
- ICM included for real-time monitoring (GRM only)
- Data logging and storage of up to 4000 test memory results (GRM only)

Applications:

- Filling and filtering hydraulic fluids and lubrication tanks.
- Filter unit can be connected off-line to the tank (recommended max volume 500 L), and can be used as a support to the filtration plant on start-up for fast flushing action - or as an additional filtration system for highly contaminated systems



SPECIFICATION

Pump	Gear Pump or Screw Pump (for diesel)
Electric Motor	0.75 Kw, 1400rpm, 110V/240V single phase, 415V three-phase
Flow Rate	30 L/min
Max Operating Pressure	3.5 bar
Viscosity Range	Maximum 150 cSt
Inlet Filter	100 mesh washable as standard
Outlet Filter	1/3/6/10/25 µm β>1000 flow through the element Out/In
Bypass Indicator set at 1.75bar	Rating 3.5 bar with bypass (LMP) 1.75 bar bypass (MPS) Visual/electrical indicator (on LMP) set at 2 bar
Fluid Temperature	From -10° to +80°C
Ambient Temperature	From 0° to +45 °C
Protection Class	IP 55
Seal	NBR
Fluid Compatibility	Mineral oil and diesel oil variants
Suction and hose	SAE100R4 1" swaged female 2000mm hose - available with lances
Dimensions	GRF - 75kg, 860mm (H); 560mm (D); 500mm(W) / GRM - 80kg, 860mm (H); 560mm (D); 500mm (W)
Equipment	ICM 2.0 Version available (GRM Models)

How to order

GRF/GRM302

Order example	GRF	30	2	1	M149	S
1. Model						
GRF= GRF Mobile Filtration Trolley						
GRM= GRM Mobile Filtration Trolley with ICM 2.0						
2. Flow						
30= 30 L/min						
3. Electric Power						
2= 0.75kW						
4. Electric Motor						
1= 110v single phase						
2= 240v single phase						
3= 415v 4 phase						
5. Replacement Suction Element						
M149= 173µm suction strainer						
6. Filtration						
S= No filter fitted, to be ordered seperately						

Spin-on Filters

Filter element - Standard length: Inorganic microfiber element

CS 100 A01 A P01	1 µm absolute
CS 100 A03 A P01	3 µm absolute
CS 100 A06 A P01	6 µm absolute
CS 100 A10 A P01	10 µm absolute
CS 100 A25 A P01	25 µm absolute

Filter element - Standard length: Wire-mesh element

CS 100 M25 A P01	25 µm
CS 100 M60 A P01	60 µm

Filter element - Extended length: Inorganic microfiber element

CS 150 A01 A P01	1 µm absolute
CS 150 A03 A P01	3 µm absolute
CS 150 A06 A P01	6 µm absolute
CS 150 A10 A P01	10 µm absolute
CS 150 A25 A P01	25 µm absolute

Filter element - Extended length: Wire-mesh element

CS 150 M25 A P01	25 µm
CS 150 M60 A P01	60 µm

GRF 503 / GRM 503

Available with ICM 2.0 In-line Contamination Monitor

Mobile Filtration Unit

Mobile Filtration Unit

Maximum working pressure up to 3.5 bar

Flow rate up to 50 l/min

With fast cleaning times and the option of adding a state of the art ICM 2.0 particle counter, the GRF and GRM503 mobile filtration units enable service teams to clean oil and hydraulic fluids quickly and easily - protecting complex components, machines and systems from particulate contamination.

GRF/GRM 503 units are ideal for filling and filtering hydraulic fluids and lubrication tanks. The unit can be connected off-line to the tank (recommended max volume of 1000 L), and used as a support to the filtration plant on start-up for fast flushing or as an additional filtration system for highly contaminated systems.

Available features:

- 50 L/min Flow rate
- Continuous operation at 3.5 bar
- Portable
- Water removal (optional element)
- Quick and easy to set up
- Compatible with Mineral Oil
- Calibrated to relevant ISO standards (GRM only)
- Wide variety of communication protocols as standard
- Electric control box w/pressure safety switch
- Indicators: Outlet filter w/electric cut-out switch
- Nitrile seals
- ICM included for real-time monitoring (GRM only)
- Data logging and storage of up to 4000 test memory results (GRM only)

Applications:

- Filling and filtering hydraulic fluids and lubrication tanks.
- Filter unit can be connected off-line to the tank (recommended max volume 1000 L), and can be used as a support to the filtration plant on start-up for fast flushing action - or as an additional filtration system for highly contaminated systems



SPECIFICATION

Pump	Gear Pump or Screw Pump (for diesel)
Electric Motor	1.1Kw, 1400rpm, 110V/240V single phase, 415V three-phase
Flow Rate	50 L/min
Max Operating Pressure	3.5 bar
Viscosity Range	Maximum 150 cSt
Inlet Filter	250 µm Y type strainer
Outlet Filter	3/6/10/16/25 µm β>1000 flow through the element Out/In
Bypass Indicator set at 1.75bar	Rating 3.5 bar with bypass (LMP) 1.75 bar bypass (MPS) Visual/electrical indicator (on LMP) set at 2 bar
Fluid Temperature	From -10° to +80°C
Ambient Temperature	From 0° to +45 °C
Protection Class	IP 55
Seal	NBR
Fluid Compatibility	Mineral oil and diesel oil variants
Suction and pressure hose	SAE100R4 1" swaged female 2000mm hose - available with lances
Weight	GRF - 92kg, 1151mm (H); 816mm (D); 544mm(W) / GRM - 97kg, 1151mm (H); 816mm (D); 544mm (W)
Equipment	ICM 2.0 Version available (GRM Models)

How to order

GRF/GRM503

Order example

1. Model

GRF= GRF Mobile Filtration Trolley

GRM= GRM Mobile Filtration Trolley with ICM 2.0

2. Flow

50= 50 L/min

3. Electric Power

3= 1.1 KW 4hp 1400rpm

4. Electric Motor

3= 415v 3 phase

5. Replacement Suction Element


Y250= 250µm suction strainer

6. Filtration

S= Single Spin-on (option)

SP= Double Spin-on (option)

L4305= LMP4305 (standard)

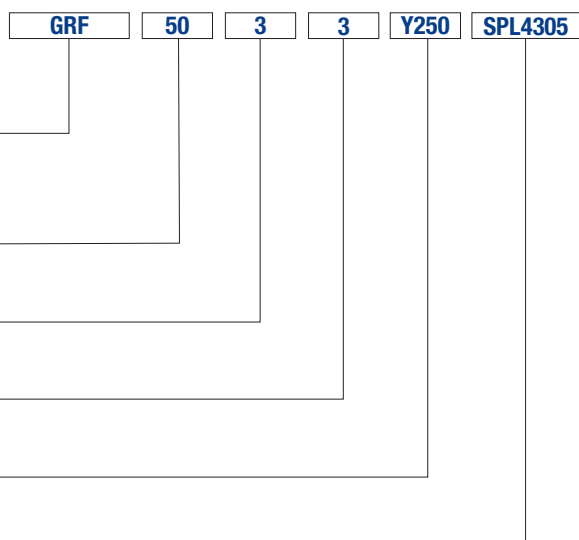

Filters

Filter element - Standard length: Inorganic microfiber element

CS 100 A01 A P01	1 µm absolute
CS 100 A03 A P01	3 µm absolute
CS 100 A06 A P01	6 µm absolute
CS 100 A10 A P01	10 µm absolute
CS 100 A25 A P01	25 µm absolute

Filter element - Standard length: Wire-mesh element

CS 100 M25 A P01	25 µm
CS 100 M60 A P01	60 µm

Filter element - Extended length: Inorganic microfiber element

CS 150 A01 A P01	1 µm absolute
CS 150 A03 A P01	3 µm absolute
CS 150 A06 A P01	6 µm absolute
CS 150 A10 A P01	10 µm absolute
CS 150 A25 A P01	25 µm absolute

Filter element - Extended length: Wire-mesh element

CS 150 M25 A P01	25 µm
CS 150 M60 A P01	60 µm

LMP Length 5 elements - Inorganic microfibres element

CU 400 5 A03 A N P01	3 µm absolute
CU 400 5 A06 A N P01	6 µm absolute
CU 400 5 A10 A N P01	10 µm absolute
CU 400 5 A16 A N P01	16 µm absolute
CU 400 5 A25 A N P01	25 µm absolute

Equipped with ICM 2.0 In-line Contamination Monitor

Mobile Filtration Unit

Fluid Transfer Unit
80 Litre onboard resevoir
Flow rate up to 15 L/Min

Designed for filling; recirculation (via an onboard 80L reservoir), and emptying filtered hydraulic fluids and lubrication tanks.

The FTU can be utilised either as additional filtration for a system with a high incidence of contamination, or as a standalone recirculating filtration circuit to clean fluid to a predetermined contamination level - monitored by the onboard ICM - prior to transfer of fluid to the system.

Key features:

- Continuous operation at 3.5 bar
- Specialist onboard filtration unit
- Easy to maintain
- Large dirt-holding capacity
- Comes with LMP4305 and MPS100 spin on filters as standard
- Water removal spin on option
- Compatible with Mineral Oil
- Calibrated to relevant ISO standards – ICM
- Electric control box
- Indicators: Outlet filter with electric cut-out switch
- Nitrile Seals
- ICM 2.0 included for real time monitoring
- Data logging and storage of up to 4000 test memory results

Applications:

- Low flow rate for filling of reservoirs
- Low-flow filtration for off-line tanks
- Pre-filtration ability of fluid prior to filling of the hydraulic system
- Configuration with start / stop automatic motor cut-out from differential pressure indicator - electrical / visual
- Configuration with start / stop phase inverter automatic motor cut-out from differential pressure indicator - electrical / visual



SPECIFICATION

Pump	Gear Pump
Electric Motor	0.75kW 1400rpm, 110/230V single phase
Flow Rate	15 L/min
Max Operating Pressure	3.5 bar
Inlet	Inlet (pump protection) filtration steel 250µm Y-type strainer
Viscosity Range	Maximum 150 cSt
Tank Filter	250 µm metal mesh suction strainers
Outlet Filter	In-line filtration 3 µm absolute B 1000 element bypass set at 3 bar.
Bypass Valve	Rating 3.5 bar with bypass Water removal “spin-on” type, bypass set at 1.75 bar.
Controls	Electrical Control Box
Indicator	Delivery line electric cut out switch
Fluid Temperature	From -10° to +80°C *
Ambient Temperature	From 0° to +40 °C* (*viscosity dependent)
Protection Class	IP 55
Seal	NBR
Fluid Compatibility	Mineral oil compatible
Hose	Flexible hoses - SAE100R4 fw 1” BSP swaged females 2mtr long hose
Dimensions	Weight: 200kg Dimensions: 1155mm (H); 1082mm (D); 665mm(W)
Equipment	ICM 2.0 Version available

How to order

FTU080

Order example	FTU	80	1	15	2	1	M250	SL4305
1. Model FTU= Fluid Transfer Unit								
2. Onboard reservoir 80= 80 Litres								
3. Inline Contamination Monitor 1= ICM 2.0								
4. Flow rate 15= 15 L/min								
5. Motor Power 2= 0.75 kW, 1400 rpm								
6. Voltage 1= 110v - 50Hz single phase 2= 220v - 50Hz single phase								
7. Inlet Filtration M250= 250 µm suction strainer (internal of reservoir)								
8. Outlet Filtration SL4305= Single spin on plus LMP length 5 (no elements included*)								

Filters

Filter element - Standard length: Inorganic microfiber element

CS 100 A01 A P01	1 µm absolute
CS 100 A03 A P01	3 µm absolute
CS 100 A06 A P01	6 µm absolute
CS 100 A10 A P01	10 µm absolute
CS 100 A25 A P01	25 µm absolute

Filter element - Standard length: Wire-mesh element

CS 100 M25 A P01	25 µm
CS 100 M60 A P01	60 µm

Filter element - Extended length: Inorganic microfiber element

CS 150 A01 A P01	1 µm absolute
CS 150 A03 A P01	3 µm absolute
CS 150 A06 A P01	6 µm absolute
CS 150 A10 A P01	10 µm absolute
CS 150 A25 A P01	25 µm absolute

Filter element - Extended length: Wire-mesh element

CS 150 M25 A P01	25 µm
CS 150 M60 A P01	60 µm

LMP Length 5 elements - Inorganic microfibres element

CU 400 5 A03 A N P01	3 µm absolute
CU 400 5 A06 A N P01	6 µm absolute
CU 400 5 A10 A N P01	10 µm absolute
CU 400 5 A16 A N P01	16 µm absolute
CU 400 5 A25 A N P01	25 µm absolute

Water Removal - Extended Length: Multi-layer water absorber

CW150P10A	10 µm absolute
-----------	----------------



PASSION TO PERFORM



MP Filtri U.K. Ltd

Bourton on the Water
Gloucestershire - United Kingdom
+44 (0) 1451 822 522
sales@mpfiltri.co.uk

PASSION TO PERFORM

The data and information contained in this publication are provided only for the purpose of information.
MP Filtri reserves the right to make changes to the models and versions of the products described at any time,
both for technical and commercial reasons.

The colours and photographs of the products are purely indicative.
Any reproduction, partial or total, of this document is strictly prohibited.
Rights reserved.