

HYDRAULIC FILTRATION PRODUCTS

SPIN-ON FILTERS



PASSION TO PERFORM





A WORLDWIDE LEADER IN THE FIELD OF HYDRAULIC FILTRATION EQUIPMENT.

Our company started life in 1964, when Bruno Pasotto decided to attempt to cater for the requests of a market still to be fully explored, with the study, design, development, production and marketing of a vast range of filters for hydraulic equipment, capable of satisfying the needs of manufacturers in all sectors. The quality of our products, our extreme competitiveness compared with major international producers and our constant activities of research, design and development has made us a worldwide leader in the field of hydraulic circuit filtering. Present for over 50 years in the market, we have played a truly decisive role in defining our sector, and by now we are a group capable of controlling our entire chain of production, monitoring all manufacturing processes to guarantee superior quality standards and to provide concrete solutions for the rapidly evolving needs of customers and the market.

MARKET LEADER



Our work is based on a skillful interaction between advanced technology and fine workmanship, **customizing products according to specific market requests**, focusing strongly on innovation and quality, and following every step in the manufacturing of both standard and special products, fully respecting customer expectations.



Our customer-oriented philosophy, which enables us to satisfy all customer requests **rapidly and with personalized products**, makes us a **dynamic and flexible enterprise**. The possibility of constantly controlling and monitoring the entire production process is essential to allow us to guarantee the quality of our products.

WORLDWIDE PRESENCE

Our foreign Branches enable us to offer a diversified range of products that allow us to successfully face the aggressive challenge of international competition, and also to maintain a stable presence at a local level.

The Group boasts **8 business branches**



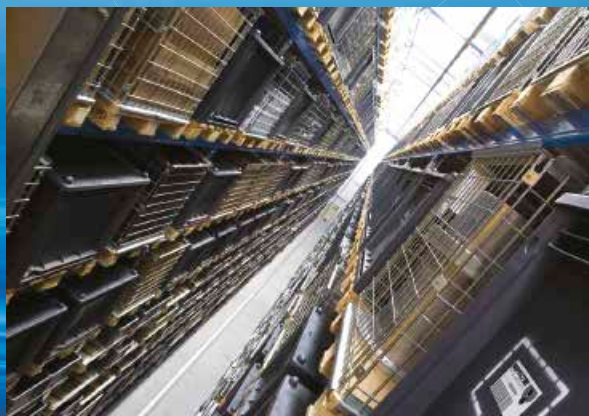
TECHNOLOGY

Our constant **quest for excellence in quality and technological innovation** allows us to offer only the best solutions and services for applications in many fields, including general industry, test rigs, lubrication, heavy engineering, renewable energies, naval engineering, offshore engineering, aviation systems, emerging technologies and mobile plant (i.e. tractors, excavators, concrete pumps, platforms).



AND PRODUCTION

Our high level of technological expertise means **we can rely entirely on our own resources, without resorting to external providers.** This in turn enables us to satisfy a growing number of customer requests, also exploiting our constantly updated range of machines and equipment, featuring **fully-automated workstations** capable of **24-hour production.**





SUCTION FILTERS

Flow rates
up to 875 l/min

Mounting:
- Tank immersed
- In-Line
- In tank with
shut off valve
- In tank
with flooded suction

RETURN FILTERS

Flow rates
up to 3000 l/min

Pressure
up to 20 bar

Mounting:
- In-Line
- Tank top
- In single
and duplex designs

RETURN / SUCTION FILTERS

Flow rates
up to 300 l/min

Pressure
up to 80 bar

Mounting:
- In-Line
- Tank top

SPIN-ON FILTERS

Flow rates
up to 365 l/min

Pressure
up to 35 bar

Mounting:
- In-Line
- Tank top

LOW & MEDIUM PRESSURE FILTERS

Flow rates
up to 3000 l/min

Pressure
up to 80 bar

Mounting:
- In-Line
- Parallel manifold version
- In single
and duplex designs

HIGH PRESSURE FILTERS

Flow rates
up to 750 l/min

Pressure from 110 bar
up to 560 bar

Mounting:
- In-Line
- Manifold
- In single
and duplex designs

PRODUCT RANGE

MP Filtri can offer a vast and articulated range of products for the global market, suitable for all industrial sectors using hydraulic equipment.

This includes filters (suction, return, return/suction, spin-on, pressure, stainless steel pressure) and structural components (motor/pump bell-housings, transmission couplings, damping rings, foot brackets, aluminium tanks, cleaning covers).

We can provide all the skills and solutions required by the modern hydraulics industry to monitor contamination levels and other fluid conditions.

Mobile filtration units and a full range of accessories allow us to supply everything necessary for a complete service in the hydraulic circuits.



STAINLESS STEEL HIGH PRESSURE FILTERS

Flow rates
up to 125 l/min

Pressure from 320 bar
up to 1000 bar

Mounting:

- In-Line
- Manifold
- In single
and duplex designs



CONTAMINATION MONITORING PRODUCTS

- Online, in-line particle counters
- Off-line bottle sampling products
- Fully calibrated using relevant ISO standards
- A wide range of variants to support fluid types and communication protocols



MOBILE FILTRATION UNITS

Flow rates from 15 l/min
up to 200 l/min



POWER TRANSMISSION PRODUCTS

- Aluminium bell-housings for motors from 0.12 kW to 400 kW
- Couplings in Aluminium Cast Iron - Steel
- Damping rings
- Foot bracket
- Aluminium tanks
- Cleaning covers



TANK ACCESSORIES

- Oil filler and air breather plugs
- Optical and electrical level gauges
- Pressure gauge valve selectors
- Pipe fixing brackets
- Pressure gauges

HYDRAULIC FILTRATION PRODUCTS

1	page	INTRODUCTION
1		COMPANY
6		PRODUCT RANGE
11		CONTAMINATION MANAGEMENT
22		FILTER SIZING
24		CORRECTIVE FACTOR

28	page	SUCTION FILTERS		up to Q_{max}
				l/min gpm
31	STR & MPA - MPM	Submerged suction filter, with bypass or magnetic filter		1000 264
39	SF2 250 - 350	Semi-submerged positive head suction filter, low flow rate		160 42
47	SF2 500	Semi-submerged positive head suction filter, high flow rate		700 185
57	CLOGGING INDICATORS			

60	page	RETURN FILTERS	up to P_{max}	up to Q_{max}
			bar psi	l/min gpm
63	MPFX	Tank top semi-immersed filter, standard filter element disassembly	8 116	900 238
91	MPLX	Tank top semi-immersed filter, standard filter element disassembly	10 145	1800 476
99	MPTX	Tank top semi-immersed filter, easy filter element disassembly	8 116	300 79
117	MFBX	Bowl assembly	8 116	700 185
125	MPF	Tank top semi-immersed filter, standard filter element disassembly	8 116	900 238
153	MPT	Tank top semi-immersed filter, easy filter element disassembly	8 116	300 79
171	MFB	Bowl assembly	8 116	700 185
179	MPH	Tank top semi-immersed filter, standard filter element disassembly	10 145	3500 925
203	MPI	Tank top semi-immersed filter, standard filter element disassembly	10 145	3500 925
215	FRI	Tank top semi-immersed filter, easy filter element disassembly, it can be used also as in-line filter	20 290	2500 660
231	RF2	Semi-immersed under-head filter, easy filter element disassembly	20 290	615 162
238	CLOGGING INDICATORS			
248	ACCESSORIES			

250	page	RETURN / SUCTION FILTERS	up to P_{max}	up to Q_{max}
			bar psi	l/min gpm
253	MRSX	Unique TANK TOP filter for mobile machinery, with combined filtration on return and suction to the inlet at the hydrostatic transmissions in closed circuit	10 145	250 66
265	LMP 124 MULTIPORT	Unique IN-LINE filter for mobile machinery, with combined filtration on return and suction to the inlet at the hydrostatic transmissions in closed circuit	80 1160	120 32
273	CLOGGING INDICATORS			

286	page	SPIN-ON FILTERS	up to P_{max}	up to Q_{max}
			bar psi	l/min gpm
289	MPS	Low pressure filter, available with single cartridge (CS) for in-line or flange mounting or with two cartridge on the same axis on the opposite sides	12 174	365 96
305	MSH	In-line low and medium pressure filter available with single cartridge (CH)	35 508	195 52
311	CLOGGING INDICATORS			

322	page	LOW & MEDIUM PRESSURE FILTERS	up to P _{max}		up to Q _{max}	
			bar	psi	l/min	gpm
325	LMP 110 - 120 - 123 MULTIPORT	In-line filter with Multiport design for multiple choice connection	80	1160	175	46
341	LMP 210 - 211	In-line low & medium pressure filter, low flow rate	60	870	365	96
351	LMP 400 - 401 & 430 - 431	In-line low & medium pressure filter, high flow rate	60	870	780	206
363	LMP 950 - 951	In-line filter, available with 2 and up to 6 different heads	30	435	2400	634
371	LMP 952 - 953 - 954	In-line low pressure filter specifically designed to be mounted in series	25	363	4500	1189
383	LMD 211	In-line duplex medium pressure filter	60	870	200	53
391	LMD 400 - 401 & 431	In-line duplex low pressure filter	16	232	600	159
407	LMD 951	In-line duplex filter, available with 2 up to 6 different heads	16	232	1200	317
415		Filter elements designed according to DIN 24550				
417	LDP - LDD	In-line and duplex medium pressure filter	60	870	360	95
427	LMP 900 - 901	In-line low pressure filter	30	435	2000	528
435	LMP 902 - 903	In-line filter specifically designed to be mounted in series	20	290	3000	793
444	CLOGGING INDICATORS					
450	ACCESSORIES					

			up to P _{max}		up to Q _{max}	
452	page	HIGH PRESSURE FILTERS	bar	psi	l/min	gpm
455	FMP 039	Filter high pressure, low flow rate applications	110	1595	80	21
463	FMP	Filter high pressure, high flow rate applications	320	4641	500	132
475	FHP	Typical high pressure filter for mobile applications, high flow rate	420	6092	630	166
493	FMM	Typical high pressure filter for mobile applications, low flow rate	420	6092	300	79
503	FHA 051	Filter optimized for use in high pressure operating systems, low flow rate	560	8122	150	40
511	FHM	High pressure filter with intermediate manifold construction	320	4641	400	106
529	FHB	High pressure for block mounting	320	4641	485	128
543	FHF 325	In-line manifold top mounting	350	5076	550	145
553	FHD	In-line duplex high pressure filter	350	5076	250	66
567	HPB	Pressure filter kits for integration in control manifolds	420	6092	300	79
576	CLOGGING INDICATORS					

			up to P _{max}		up to Q _{max}	
(584) page	STAINLESS STEEL HIGH PRESSURE FILTERS		bar	psi	l/min	gpm
587	FZP	In-line pressure filter with threaded mount	420	6092	160	42
597	FZH	In-line pressure filter with threaded mount for higher pressure	700	10153	80	21
607	FZX	In-line pressure filter with threaded mount up to 1000 bar	1000	14504	10	3
615	FZM	Manifold top mounting	320	4641	70	18
623	FZB	Manifold side mounting	320	4641	70	18
631	FZD	Duplex pressure filter for continuous operation requirements	350	5076	60	16
641	CLOGGING INDICATORS					

page	CLOGGING INDICATORS
649	QUICK REFERENCE GUIDE

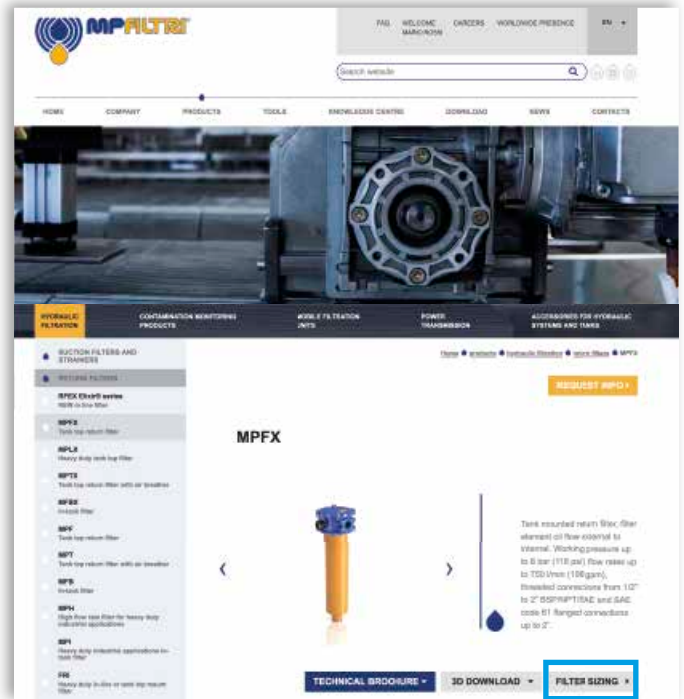
TYPICAL FILTER SIZING Selection Software

Step ①

Select "FILTER SIZING SOFTWARE" after login

OR

Select "FILTER SIZING" after login from a product page



Choose the type of filter family.
Enter the main data for sizing the filter
then push CALCULATE.

Step ②

Enter the main data for sizing the filter
then push CALCULATE.

PRODUCT SELECTION POWER TRANSMISSION SOFTWARE FILTER SIZING SOFTWARE

SUCTION LOW & MEDIUM PRESSURE HIGH PRESSURE
RETURN/SUCTION RETURN STAINLESS STEEL HIGH PRESSURE

Working Pressure (bar) * 5 Flow rate (l/min) * 90 DP max of the project (bar) * 0.5 Fluid Working Temperature (°C) * 40

Fluid * HLP - Mineral oils Fluid type * ISO VG 46 (SUS 216) Viscosity (cst) * 46 Viscosity (SUS) * 216

Filtration * A20 - 20 µm absolute inorganic microfibre Connection Type * G 1"

CALCULATE

PRODUCT SELECTION POWER TRANSMISSION SOFTWARE FILTER SIZING SOFTWARE

SUCTION LOW & MEDIUM PRESSURE HIGH PRESSURE
RETURN/SUCTION RETURN STAINLESS STEEL HIGH PRESSURE

Product: MPFX Working Pressure (bar) * 5 Flow rate (l/min) * 90 DP max of the project (bar) * 0.5 Fluid Working Temperature (°C) * 40

Fluid * HLP - Mineral oils Fluid type * ISO VG 46 (SUS 216) Viscosity (cst) * 46 Viscosity (SUS) * 216

Filtration * A20 - 20 µm absolute inorganic microfibre Connection Type * G 1"

CALCULATE

Step ③

Select the desired options to choose the appropriate filter type for the application.

Working Pressure 8 (bar) Fluid HLP
Flow rate 90 (l/min) Fluid type ISO VG 46 (SUS 216)
DP max of the project 0.5 (bar) Seal A - NBR
Working Temperature 40 (°C) Working Temperature with options -25 + 110 (°C)
Filtration 25 µm absolute inorganic microfibre Working Temperature with options -20 + 110 (°C)
Connection Type G 1" Viscosity 46 (cst) - 216 (SUS)

NEW SEARCH

Filter type MPFX: Tank top mounting - (Pmax) 1 Valve B: 1.75 bar System Seal A: NBR X RESET
Option1 Single or duplex DIN Standard NOT APPLICABLE Indicator Visual

CSV Excel Show 10 entries Search:

Image	Code	Press bar	Qmax psi	Qmax l/min	Qmax gpm	DP bar	DP psi	Housing DP bar	Housing DP psi	Element DP bar	Element DP psi	Connection	Seal	Link
	MPFX-100-3-A-G3-A20-HBPS1	8	116	25.74	25.3	0.47	7	0.12	2	0.35	5	G 1"	A	Adjustment Report
	MPFX-100-3-A-G3-A20-HBPS1	8	116	25.74	25.3	0.47	7	0.12	2	0.35	5	G 1"	A	Adjustment Report

TYPICAL FILTER SIZING

Step 4

Choose the most suitable filter from the proposed list.

Image	Code	Pressure	Flow rate	AP	Housing AP	Element AP	Connection	Seal	Link
	MPTX-100-5-A-Q3-A25-H-BPFI	8 bar	116 gpm	25.3 psi	0.47 bar	0.12 bar	G 1"	A	Adjustment
	MPTX-104-5-A-Q3-A25-H-BPFI	8 bar	116 gpm	25.3 psi	0.47 bar	0.12 bar	G 1"	A	Adjustment

Step 5

It is possible to change the filter modifying every parameter.




A SAVE YOUR FILTER'S REPORT



B MANUAL EDIT



SAVE IN YOUR ARCHIVE
typing your reference data and then SAVE AS PDF



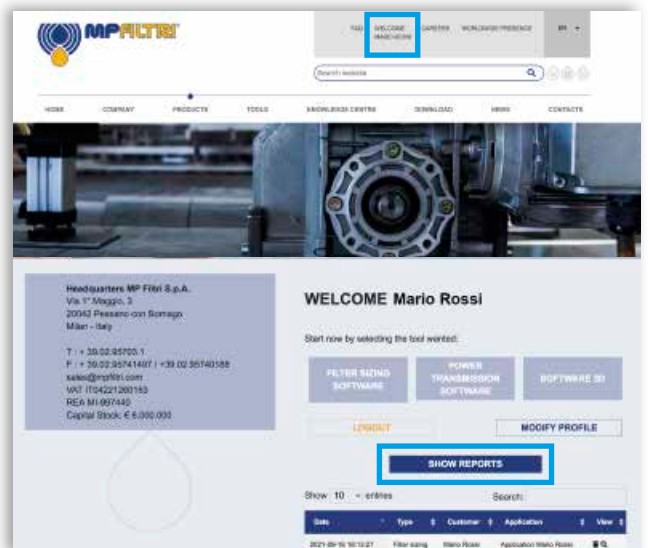
A new browser window displays the pdf

see **A**

Close the report window



By clicking your WELCOME button, the SHOW REPORTS is displayed: select it to see your filters list.



Spin-On filters are used as process and safety filters to protect individual pumps, valves or the entire hydraulic circuit from contamination as per ISO 4406.

In-line Spin-On filters can be used for the following purposes:

- **Suction filters**
- **On the return circuit, for mounting on the line or on the tank cover**
- **In-line for low and medium pressure applications**

Spin-On filters are available in 4 configurations:

- **Single cartridge in-line**
- **In-line with two parallel cartridges on the same axis**
- **In-line with two parallel cartridges mounted side by side**

All versions may be equipped with visual and/or electrical blockage indicators.

Spin-on filters



MPS	page 289
MSH	305
INDICATORS	311

MPS series

Maximum working pressure up to 1.2 MPa (12 bar) - Flow rate up to 365 l/min



Description

Technical data

Spin-on filters

Maximum working pressure up to 1.2 MPa (12 bar)

Flow rate up to 365 l/min

MPS is a range of spin-on filters suitable to be used in suction, return and low pressure lines.

They offer a good balance between performances, dimensions and prices. They are directly connected to the lines of the system through the hydraulic fittings.

Available features:

- Female threaded connections up to 1 1/2" and flanged connections up to 1 1/2", for a maximum flow rate of 365 l/min
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Water removal elements (CW), to remove the free water from the hydraulic fluid
- Double connection for the cans, to fit both European and American standard elements
- Double cans fitting, to increase the life time of the filter
- Bypass valve, to relieve excessive pressure drop across the filter media
- Visual, electrical and electronic clogging indicators for suction and return applications
- Visual, electrical and electronic differential clogging indicators for low pressure applications

Common applications:

- Suction lines, Return lines, Delivery lines, in economic industrial equipment or mobile machines.
- Off-line filtration tank in economic industrial equipment or mobile machines

Filter housing materials

- Head: Aluminium
- Bypass valve: Nylon - Steel
- Element: Zinc-Plated Steel - Painted Steel

Bypass valve

- Return filter opening pressure: 175 kPa (1.75 bar) $\pm 10\%$
- Suction filter opening pressure: 30 kPa (0.3 bar) $\pm 10\%$

Δp element type

- Δp : 5 bar
- Fluid flow through the filter element from OUT to IN

Seals

Standard NBR - series A

Temperature

From -20 °C to +110 °C











Note

MPS filters are provided for vertical mounting



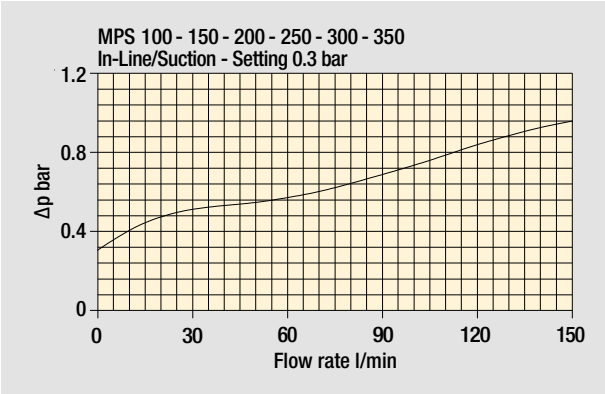
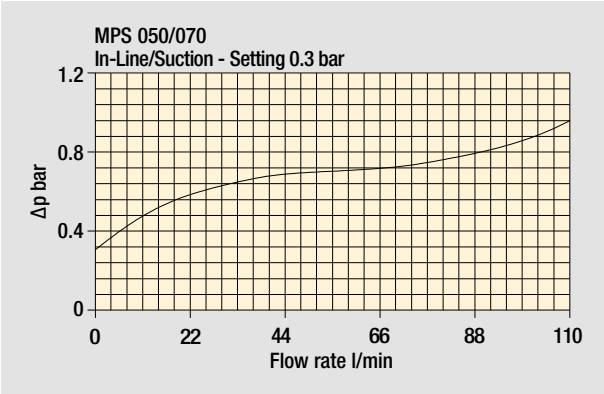
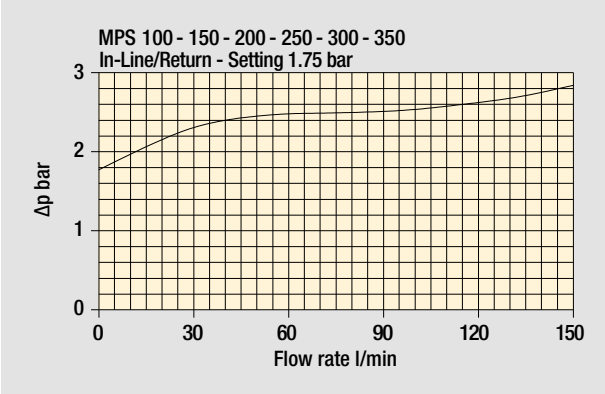
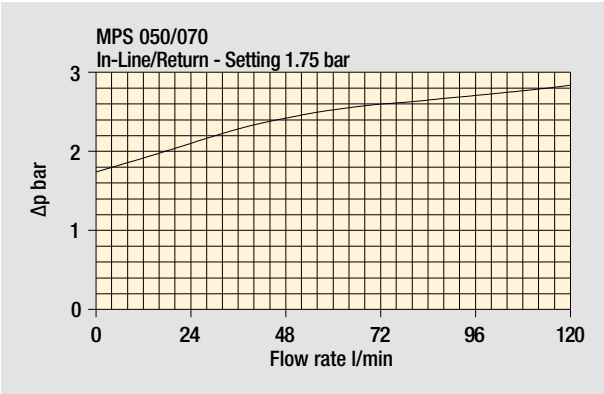
Weights [kg] and volumes [dm³]

Filter series	Weights [kg]	Volumes [dm ³]
MPS 050	1.00	0.70
MPS 051	1.05	0.70
MPS 070	1.20	0.95
MPS 071	1.25	0.95
MPS 100	2.10	1.65
MPS 101	2.20	1.65
MPS 150	2.40	2.00
MPS 151	2.50	2.00
MPS 200	3.90	3.00
MPS 250	4.60	3.70
MPS 300-301	5.30	3.40
MPS 350-351	6.00	4.10

Filter series					
MPS 050	•				
MPS 051		•			
MPS 070	•				
MPS 071		•			
MPS 100	•				
MPS 101		•			
MPS 150	•				
MPS 151		•			
MPS 200			•		
MPS 250			•		
MPS 300				•	
MPS 301				•	•
MPS 350				•	
MPS 351					•
	Style U/P	Style U/P	Style U	Style U/P	Style U/P
					
	Style R/S	Style R/S	Style R/S	Style R/S	Style R/S
					

Pressure drop

Bypass valve
pressure drop



The curves are plotted using mineral oil with density of 0.86 kg/dm³ in compliance with ISO 3968. Δp varies proportionally with density.

CS 050 - 070 - 100 - 150
CG - CW 050 - 070



CG - CW 100 - 150



CW
This series of cartridge removes water from oil while filtering the oil at the same time. Water absorbent polymers up to 800 times their own weight provide this major feature.

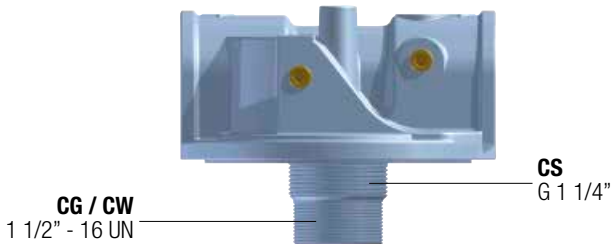
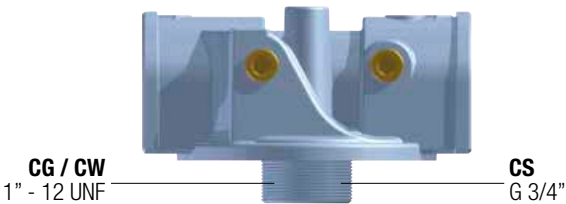
Water holding capacities:
CW 050= 240 ml
Ordering code: **CW050P10AP01**

CW 150= 788 ml
Ordering code: **CW150P10AP01**

Thread connections	
Element	Connection
CS 050 - 070	G 3/4"
CS 100 - 150	G 1 1/4"
CG / CW 050 - 070	1" - 12 UNF
CG / CW 100 - 150	1 1/2" - 16 UN

Water holding capacities CW		
	good	poor
Viscosity	30/46 mm ² /s (cSt)	> 46 mm ² /s (cSt)
H ₂ O p.p.m.	600/800 p.p.m.	> 800 p.p.m.
Flow rate	CW050 7/15 l/min CW150 20/40 l/min	CW050 > 20 l/min CW150 > 50 l/min
Temperature	40/60 °C	< 30 °C

Heads



MPS MPS050 - MPS070 MPS051 - MPS071

Designation & Ordering code

COMPLETE FILTER

Series and size

MPS050 | **MPS070** With connections for clogging indicators

MPS051 | **MPS071** With connections for differential indicators

Configuration example: **MPS050** **R** **G1** **A10** **A** **P01**

Bypass valve

	MPS 050 - 070	MPS 051 - 071
R Return: 1.75 bar	•	•
S Suction: 30 kPa	•	
U Without bypass	•	
P Without bypass		•

Connections

G1 G 3/4"
G2 3/4" NPT
G3 SAE 12 - 1 1/16" - 12 UN

Filtration rating (filter media)

A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm
A25 Inorganic microfiber 25 µm	P10 Resin impregnated paper 10 µm
	P25 Resin impregnated paper 25 µm

Seal
A NBR

Execution
P01 MP Filtri standard

CARTRIDGE

Cartridge series and size

CS050 | **CS070**

Configuration example: **CS050** **A10** **A** **P01**

Filtration rating (filter media)

A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm
A25 Inorganic microfiber 25 µm	P10 Resin impregnated paper 10 µm
	P25 Resin impregnated paper 25 µm

Seals
A NBR

Execution
P01 MP Filtri standard
Pxx Customized

ACCESSORIES

Clogging indicators on RETURN line

	page
BVA Axial pressure gauge	315
BVR Radial pressure gauge	315
BVP Visual pressure indicator with automatic reset	316
VBQ Visual pressure indicator with manual reset	316

	page
BEA Electrical pressure indicator	314
BEM Electrical pressure indicator	314
BLA Electrical / visual pressure indicator	314-315

Clogging indicators on SUCTION line

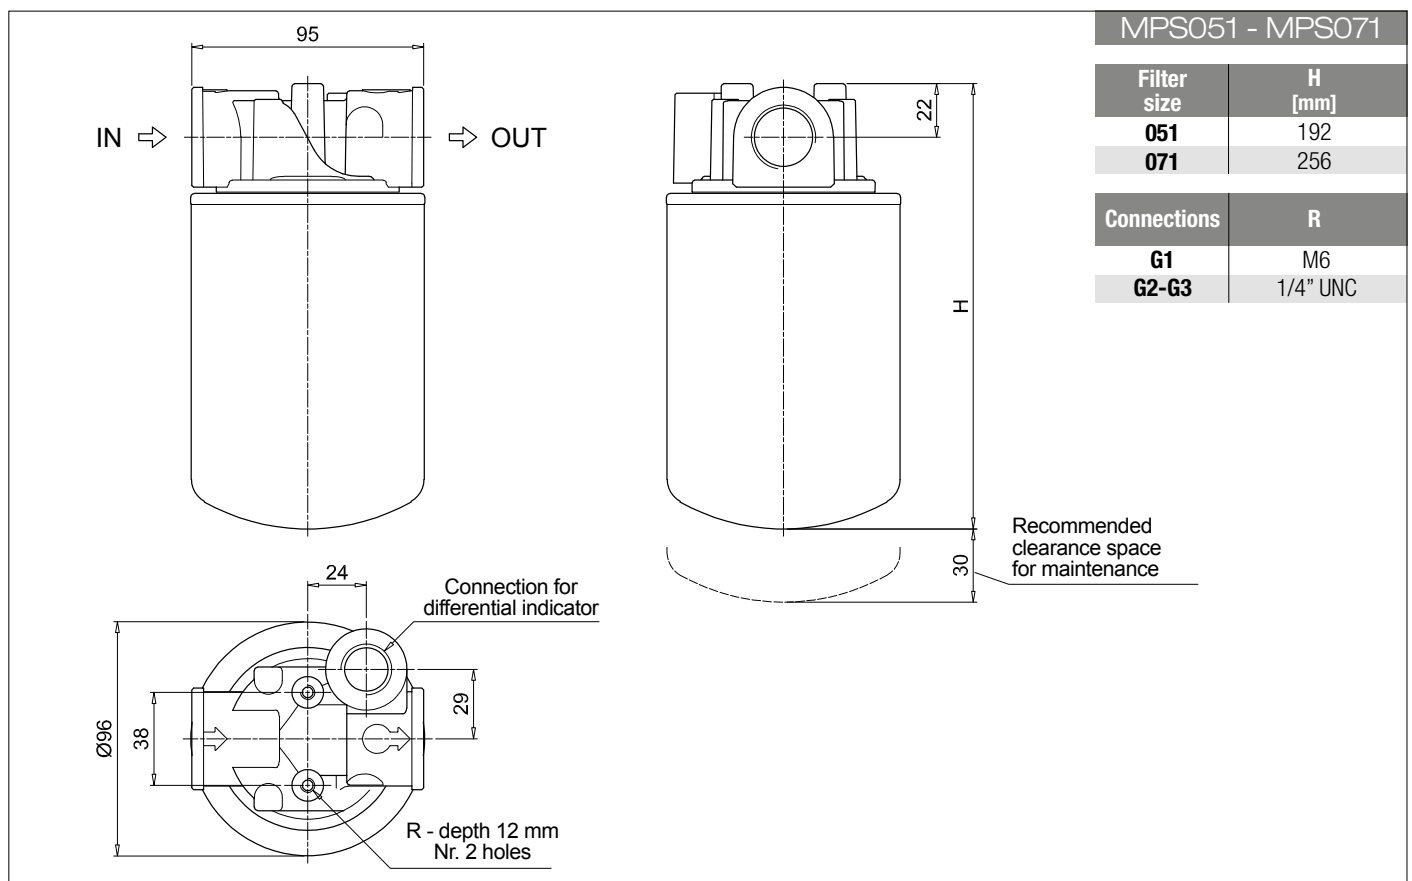
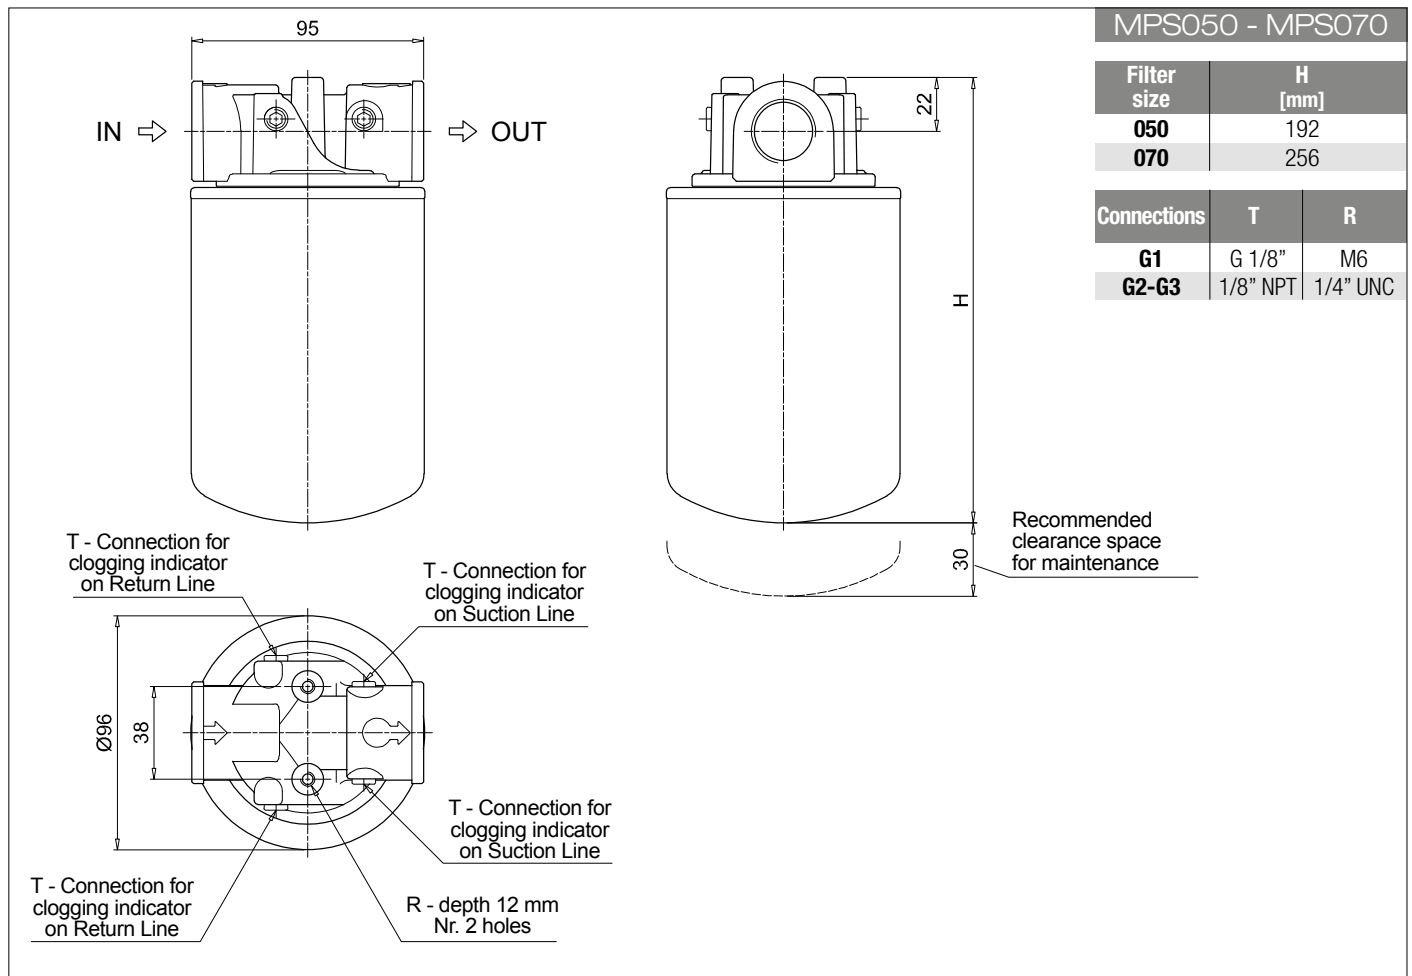
	page
VVB Axial pressure gauge	313
VVS Radial pressure gauge	313

	page
VEB Electrical vacuum indicator	312
VLB Electrical/visual vacuum indicator	312

Differential indicators

	page
DEA Electrical differential indicator	317
DEM Electrical differential indicator	317-318
DLA Electrical / visual differential indicator	318-319
DLE Electrical / visual differential indicator	319

	page
DTA Electronic differential indicator	320
DVA Visual differential indicator	320
DVM Visual differential indicator	320



MPS MPS100 - MPS150 MPS101 - MPS151

Designation & Ordering code

COMPLETE FILTER

Series and size

MPS100 | **MPS150** With connections for clogging indicators

MPS101 | **MPS151** With connections for differential indicators

Configuration example: **MPS100** **R** **G1** **A10** **A** **P01**

Bypass valve

	MPS 100 - 150	MPS 101 - 151
R Return: 1.75 bar	•	•
S Suction: 30 kPa	•	
U Without bypass	•	
P Without bypass		•

Connections

G1 G 1 1/4"
G2 1 1/4" NPT
G3 SAE 20 - 1 5/8" - 12 UN

Filtration rating (filter media)

A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm
A25 Inorganic microfiber 25 µm	P10 Resin impregnated paper 10 µm
	P25 Resin impregnated paper 25 µm

Seal
A NBR

Execution
P01 MP Filtri standard

CARTRIDGE

Cartridge series and size

CS100 | **CS150**

Configuration example: **CS100** **A10** **A** **P01**

Filtration rating (filter media)

A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm
A25 Inorganic microfiber 25 µm	P10 Resin impregnated paper 10 µm
	P25 Resin impregnated paper 25 µm

Seals
A NBR

Execution
P01 MP Filtri standard
Pxx Customized

ACCESSORIES

Clogging indicators on RETURN line

	page
BVA Axial pressure gauge	315
BVR Radial pressure gauge	315
BVP Visual pressure indicator with automatic reset	316
VBQ Visual pressure indicator with manual reset	316

	page
BEA Electrical pressure indicator	314
BEM Electrical pressure indicator	314
BLA Electrical / visual pressure indicator	314-315

Clogging indicators on SUCTION line

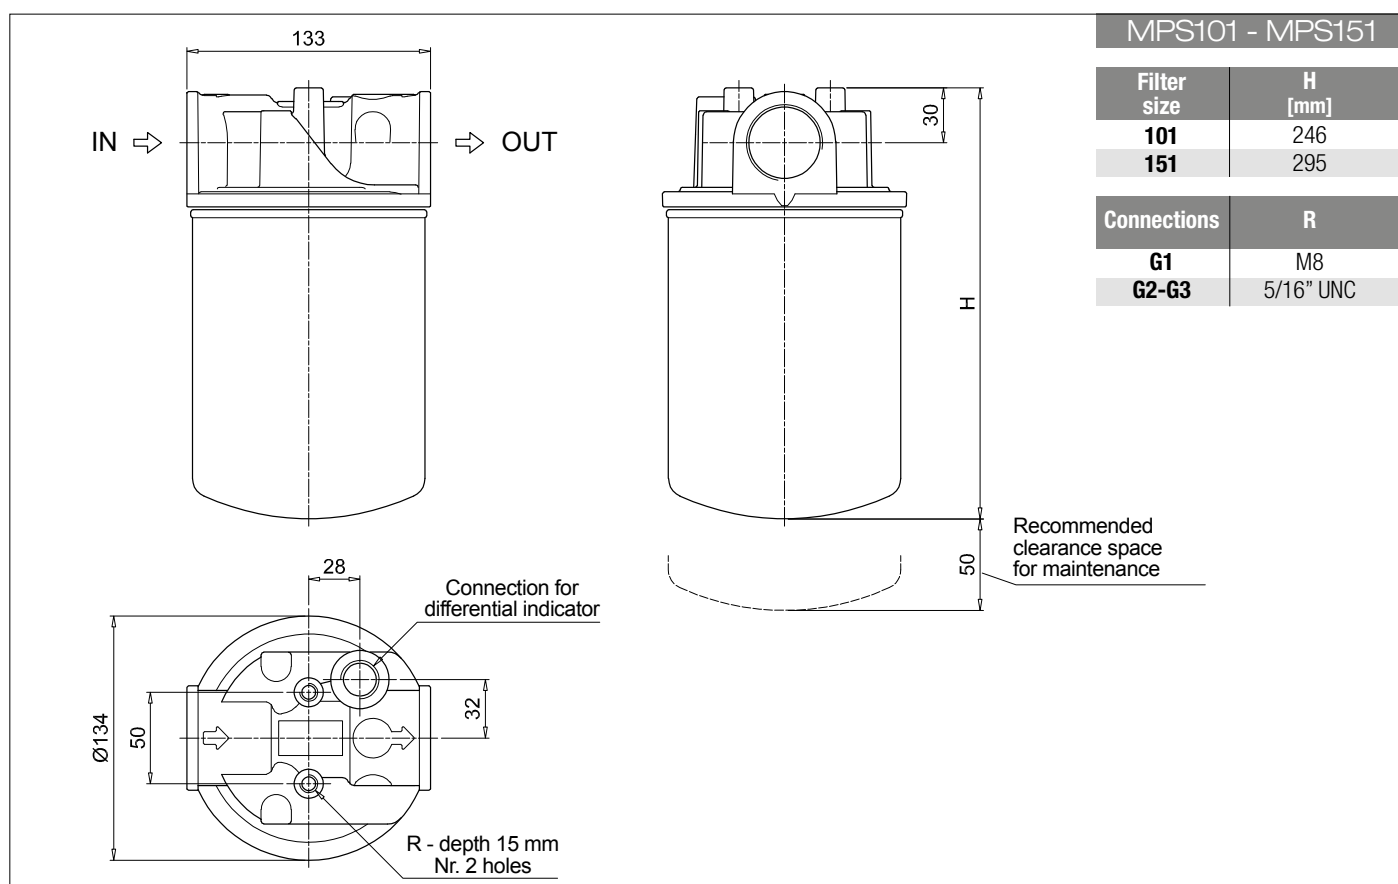
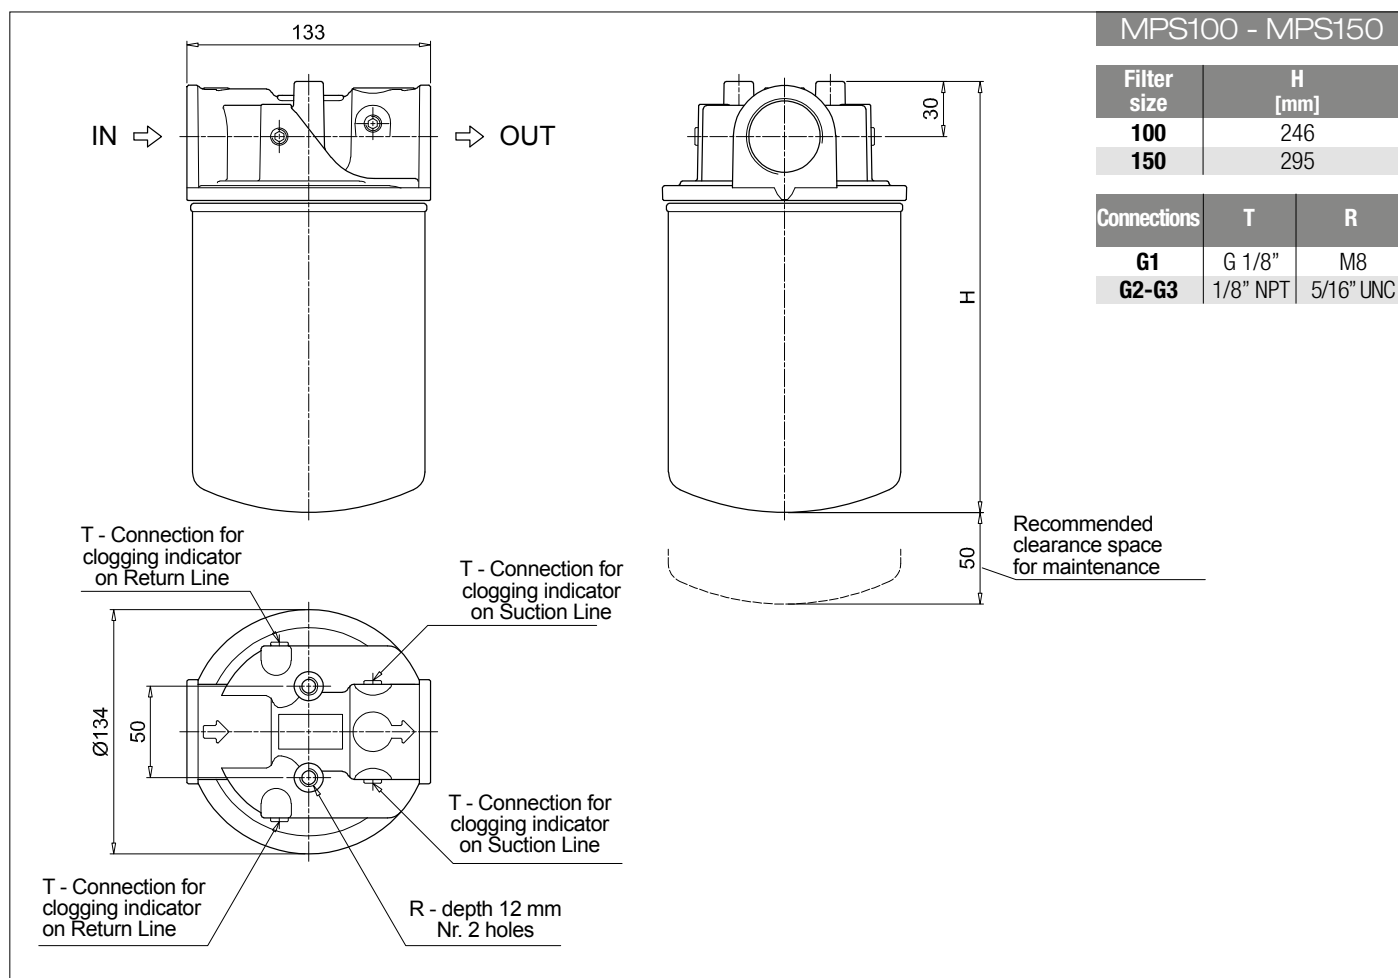
	page
VVB Axial pressure gauge	313
VVS Radial pressure gauge	313

	page
VEB Electrical vacuum indicator	312
VLB Electrical/visual vacuum indicator	312

Differential indicators

	page
DEA Electrical differential indicator	317
DEM Electrical differential indicator	317-318
DLA Electrical / visual differential indicator	318-319
DLE Electrical / visual differential indicator	319

	page
DTA Electronic differential indicator	320
DVA Visual differential indicator	320
DVM Visual differential indicator	320



MPS MPS200 - MPS250

Designation & Ordering code

COMPLETE FILTER

Series and size

MPS200 | **MPS250**

Configuration example: **MPS200** **R** **G1** **A10** **A** **P01**

Bypass valve

R Return: 1.75 bar

S Suction: 30 kPa

U Without bypass

Connections

G1 G 1 1/2"

G2 1 1/2" NPT

G3 SAE 24 - 1 7/8" - 12 UN

Filtration rating (filter media)

A03 Inorganic microfiber 3 µm

A06 Inorganic microfiber 6 µm

A10 Inorganic microfiber 10 µm

A25 Inorganic microfiber 25 µm

M25 Wire mesh 25 µm

M60 Wire mesh 60 µm

M90 Wire mesh 90 µm

P10 Resin impregnated paper 10 µm

P25 Resin impregnated paper 25 µm

Seal

A NBR

Execution

P01 MP Filtri standard

CARTRIDGE

Cartridge series and size

CS100 | **CS150**

Configuration example: **CS100** **A10** **A** **P01**

Filtration rating (filter media)

A03 Inorganic microfiber 3 µm

A06 Inorganic microfiber 6 µm

A10 Inorganic microfiber 10 µm

A25 Inorganic microfiber 25 µm

M25 Wire mesh 25 µm

M60 Wire mesh 60 µm

M90 Wire mesh 90 µm

P10 Resin impregnated paper 10 µm

P25 Resin impregnated paper 25 µm

Seals

A NBR

Execution

P01 MP Filtri standard

Pxx Customized

ACCESSORIES

Clogging indicators on RETURN line

BVA Axial pressure gauge 315

BVR Radial pressure gauge 315

BVP Visual pressure indicator with automatic reset 316

VBQ Visual pressure indicator with manual reset 316

BEA Electrical pressure indicator 314

BEM Electrical pressure indicator 314

BLA Electrical / visual pressure indicator 314-315

Clogging indicators on SUCTION line

VVB Axial pressure gauge 313

VVS Radial pressure gauge 313

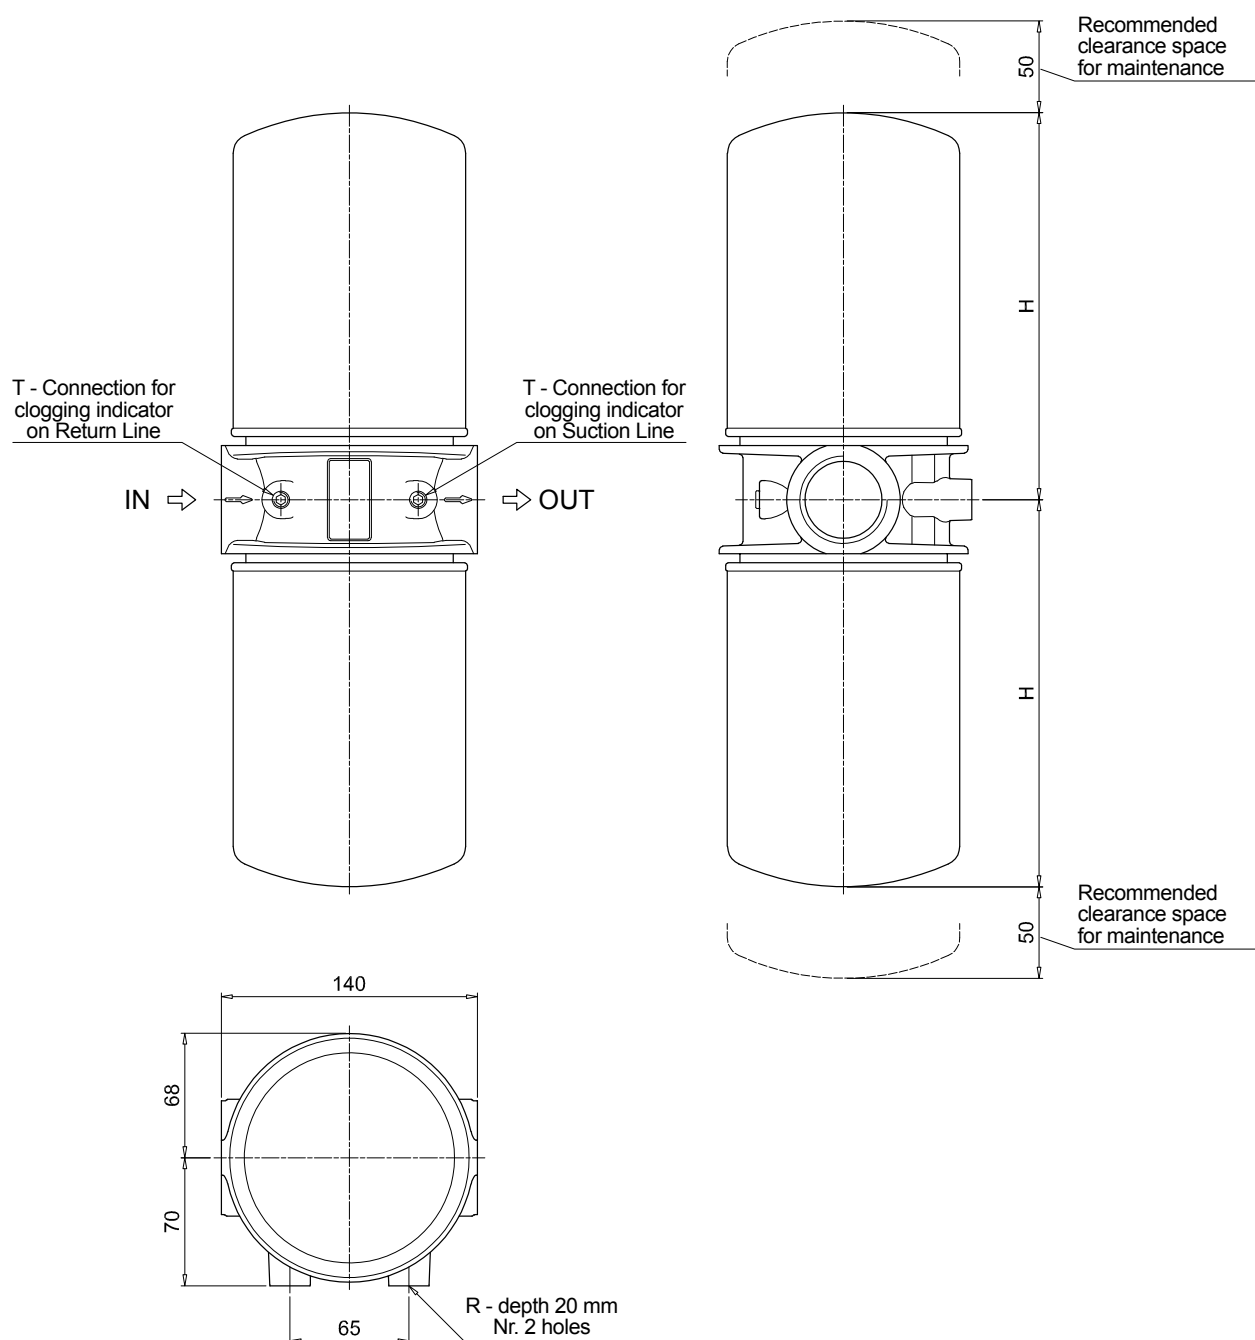
VEB Electrical vacuum indicator 312

VLB Electrical/visual vacuum indicator 312

MPS200 - MPS250

Filter size	H [mm]
200	213
250	262

Connections	T	R
G1	G 1/8"	M10
G2-G3	1/8" NPT	7/16" UNC



MPS MPS300 - MPS350 MPS301 - MPS351

Designation & Ordering code

COMPLETE FILTER

Series and size

MPS300 | **MPS350** With connections for clogging indicators

MPS301 | **MPS351** With connections for differential indicators

Configuration example: **MPS300** **R** **F1** **A10** **A** **P01**

Bypass valve

	MPS 300 - 350	MPS 301 - 351
R Return: 1.75 bar	•	•
S Suction: 30 kPa	•	
U Without bypass	•	
P Without bypass		•

Connections

G1 G 1 1/2"	
G2 1 1/2" NPT	
G3 SAE 24 - 1 7/8" - 12 UN	
F1 1 1/2" SAE 3000 psi/M	
F2 1 1/2" SAE 3000 psi/UNC	

Filtration rating (filter media)

A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm
A25 Inorganic microfiber 25 µm	P10 Resin impregnated paper 10 µm
	P25 Resin impregnated paper 25 µm

Seal
A NBR

Execution
P01 MP Filtri standard

CARTRIDGE

Cartridge series and size

CS100 | **CS150**

Configuration example: **CS100** **A10** **A** **P01**

Filtration rating (filter media)

A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm
A25 Inorganic microfiber 25 µm	P10 Resin impregnated paper 10 µm
	P25 Resin impregnated paper 25 µm

Seals
A NBR

Execution
P01 MP Filtri standard
Pxx Customized

ACCESSORIES

Clogging indicators on RETURN line

	page
BVA Axial pressure gauge	315
BVR Radial pressure gauge	315
BVP Visual pressure indicator with automatic reset	316
BVQ Visual pressure indicator with manual reset	316

BEA Electrical pressure indicator	314
BEM Electrical pressure indicator	314
BLA Electrical / visual pressure indicator	314-315

Clogging indicators on SUCTION line

	page
VVB Axial pressure gauge	313
VVS Radial pressure gauge	313

VEB Electrical vacuum indicator	312
VLB Electrical/visual vacuum indicator	312

Differential indicators

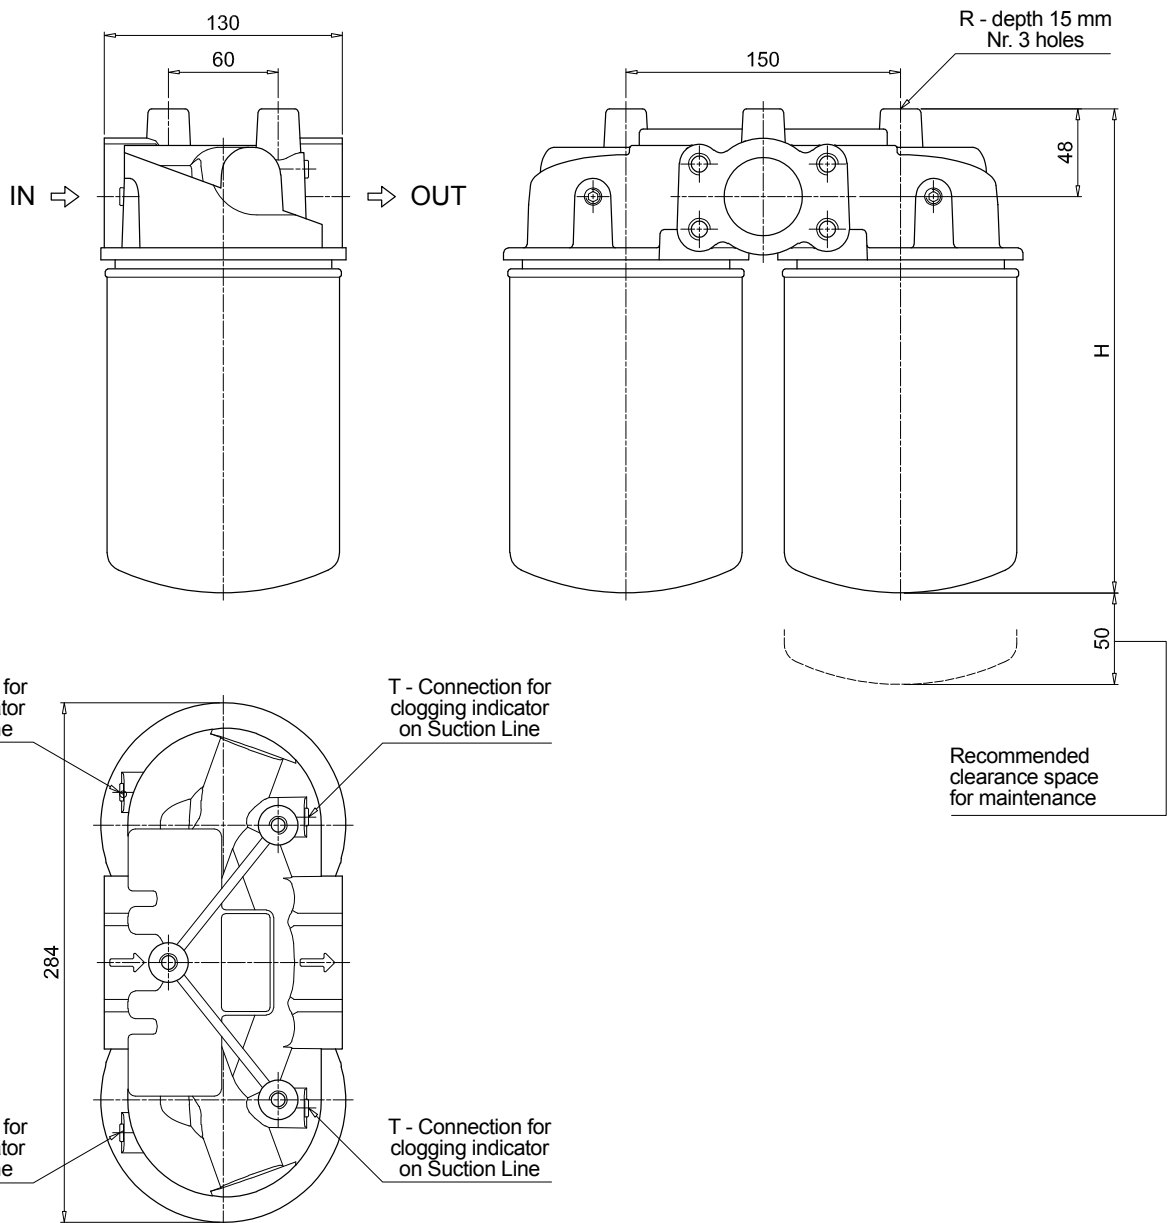
	page
DEA Electrical differential indicator	317
DEM Electrical differential indicator	317-318
DLA Electrical / visual differential indicator	318-319
DLE Electrical / visual differential indicator	319

DTA Electronic differential indicator	320
DVA Visual differential indicator	320
DVM Visual differential indicator	320

MPS300 - MPS350

Filter size	H [mm]
300	266
350	315

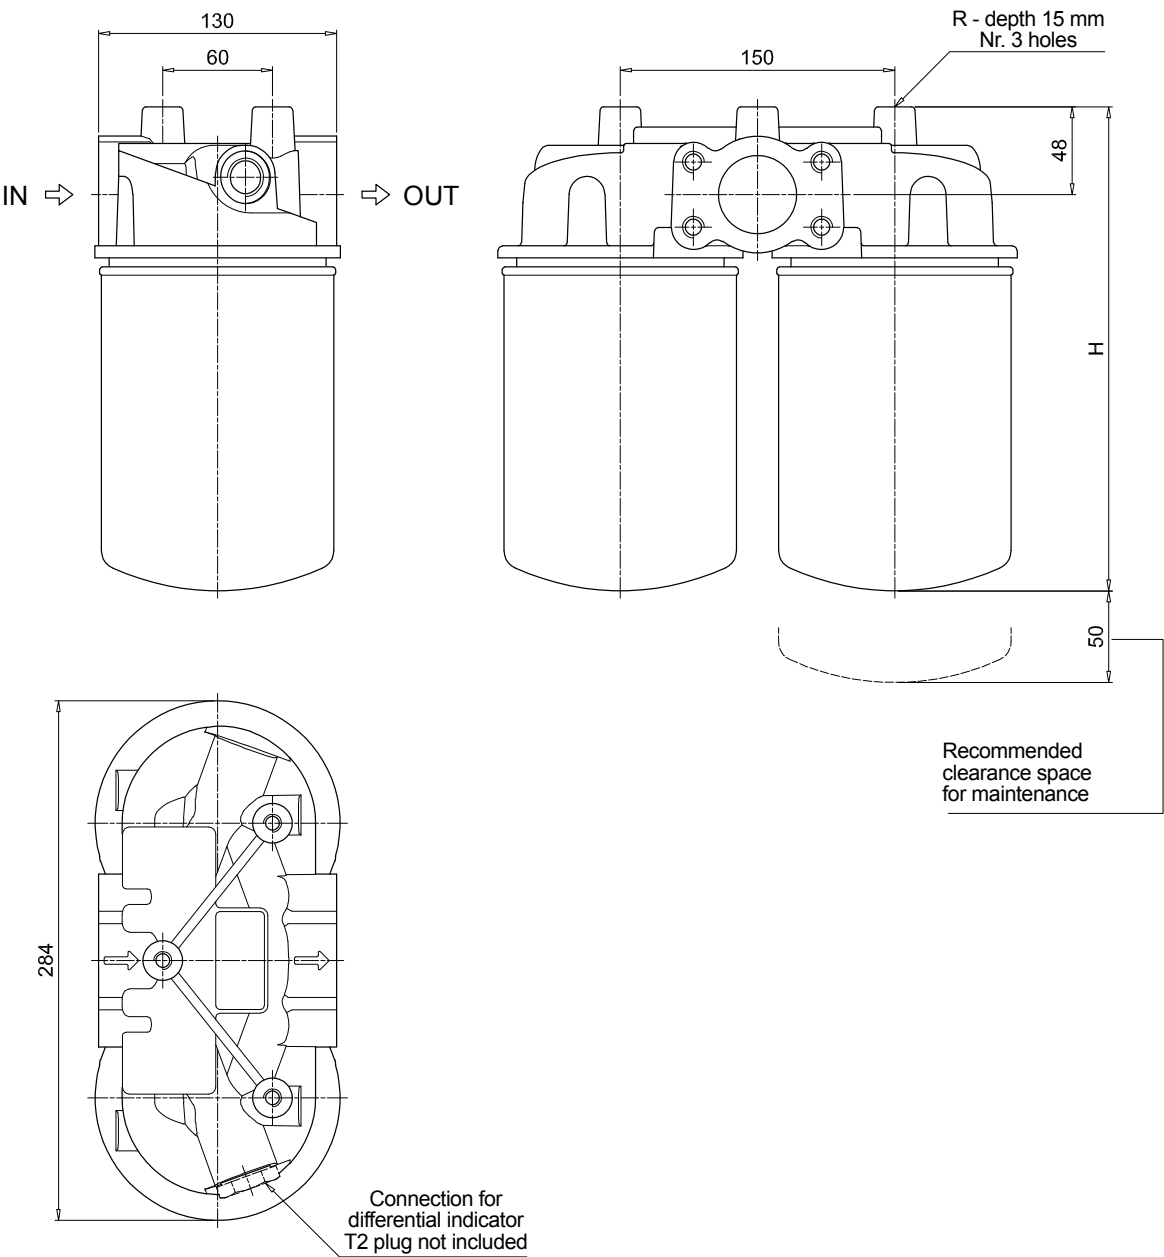
Connections	T	R
G1	G 1/8"	M10
G2-G3	1/8" NPT	7/16" UNC
F1	G 1/8"	M10
F2	1/8" NPT	7/16" UNC



MPS MPS300 - MPS350 MPS301 - MPS351

Dimensions

MPS301 - MPS351	
Filter size	H [mm]
301	266
351	315
Connections	R
G1	M10
G2-G3	7/16" UNC
F1	M10
F2	7/16" UNC



MSH series

Maximum working pressure up to 3.5 MPa (35 bar) - Flow rate up to 195 l/min



Description

Technical data

Spin-on filters

Maximum working pressure up to 3.5 MPa (35 bar)
Flow rate up to 195 l/min

MSH is a range of spin-on filters suitable to be used in low pressure lines. They offer a good balance between performances, dimensions and prices. They are directly connected to the lines of the system through the hydraulic fittings.

Available features:

- Female threaded connections up to 1 1/4", for a maximum flow rate of 195 l/min
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Strong sealing between the housing and cans, to be used in heavy applications
- Bypass valve, to relieve excessive pressure drop across the filter media
- Visual, electrical and electronic differential clogging indicators for low pressure applications

Common applications:

- Delivery lines, in economic industrial equipment or mobile machines

Filter housing materials

- Head: Anodized Aluminium
- Bypass valve: Nylon - Steel
- Element: Aluminium - Painted Steel

Bypass valve

Opening pressure: 250 kPa (2.5 bar) $\pm 10\%$

Δp element type

- Δp : 5 bar
- Oil flow from OUT to IN

Seals

- Standard NBR - series A
- Optional FPM - series V

Temperature

From -20 °C to +110 °C

Note

MSH filters are provided for vertical mounting




Weights [kg] and volumes [dm³]


Filter series	Weights [kg]	Volumes [dm³]
MSH 050	1.50	0.65
MSH 070	1.90	0.95
MSH 100	3.30	1.80
MSH 150	3.80	2.20

Cartridge

Thread connections		CH
Type	Connection	
CH 050 - 070	M32 x 2	
CH 100 - 150	M45 x 2	

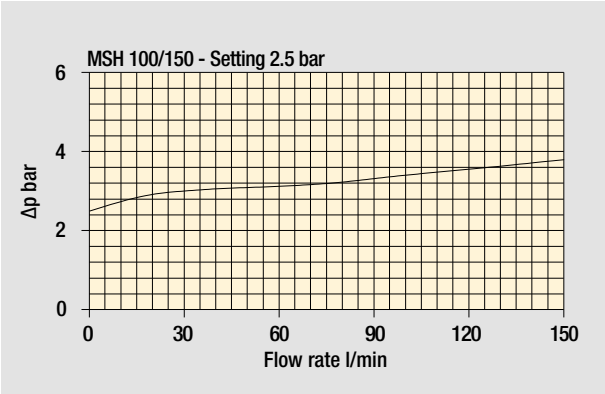
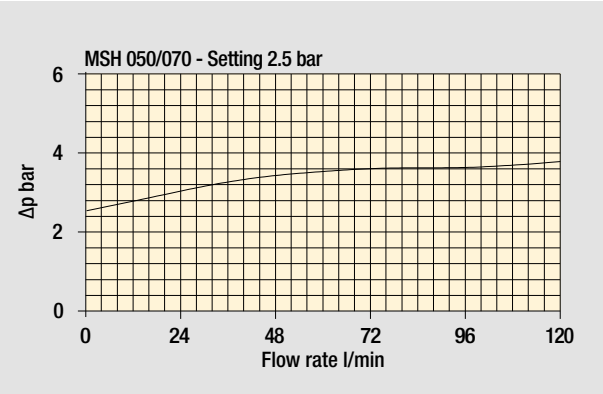
Filter series	Style S	Style B
MSH 050	•	•
MSH 070	•	•
MSH 100	•	•
MSH 150	•	•





Pressure drop

Bypass valve
pressure drop



The curves are plotted using mineral oil with density of 0.86 kg/dm³ in compliance with ISO 3968. Δp varies proportionally with density.

MSH MSH050 - MSH070 MSH100 - MSH150

Designation & Ordering code

COMPLETE FILTER

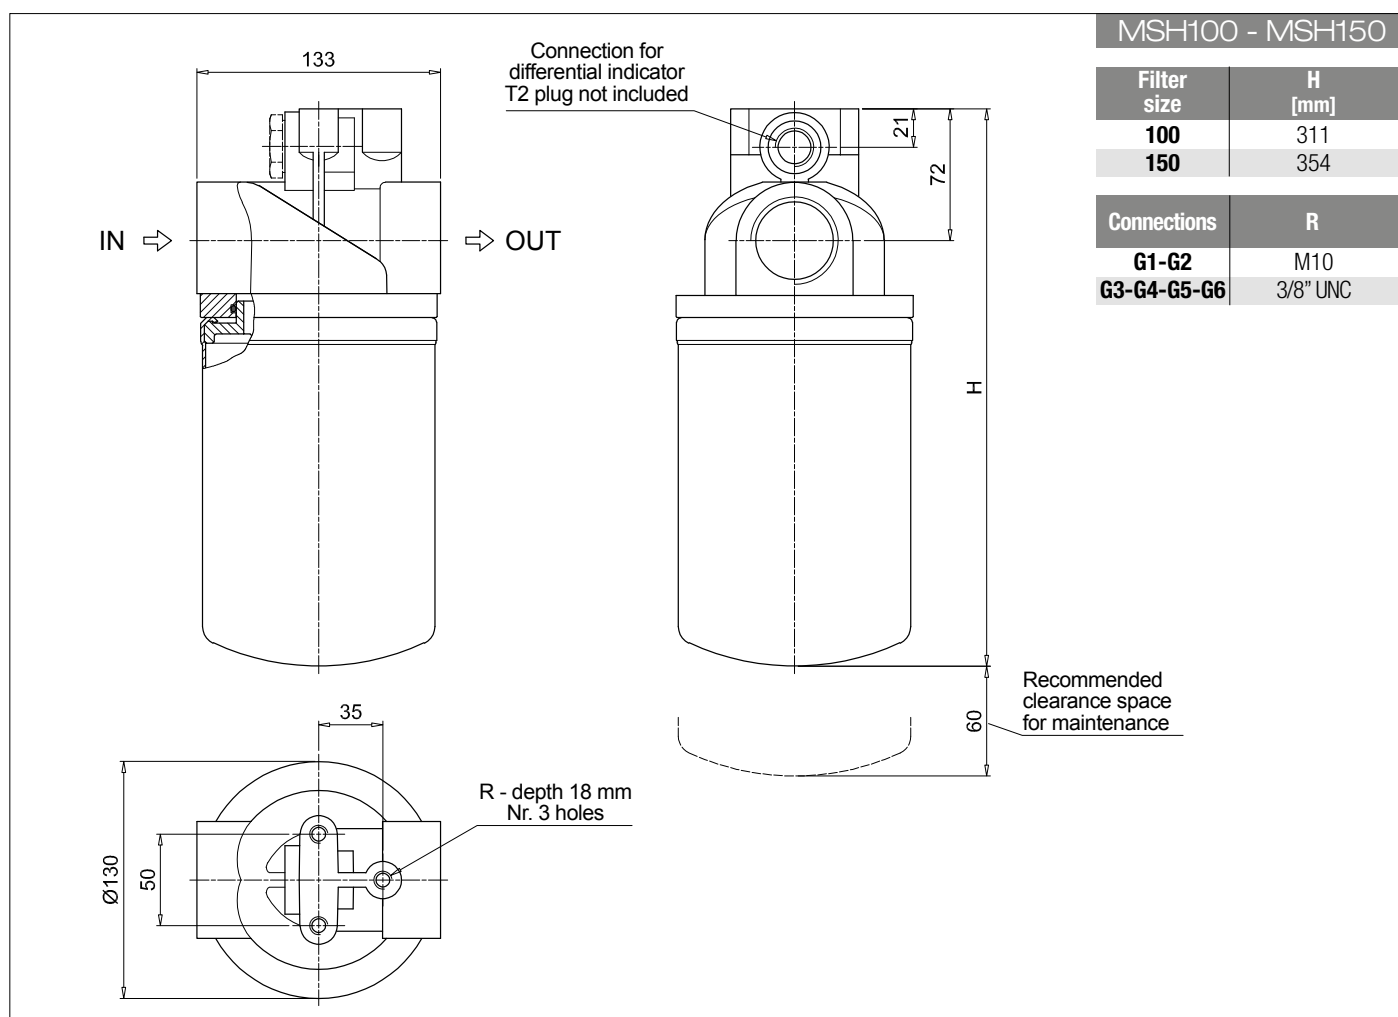
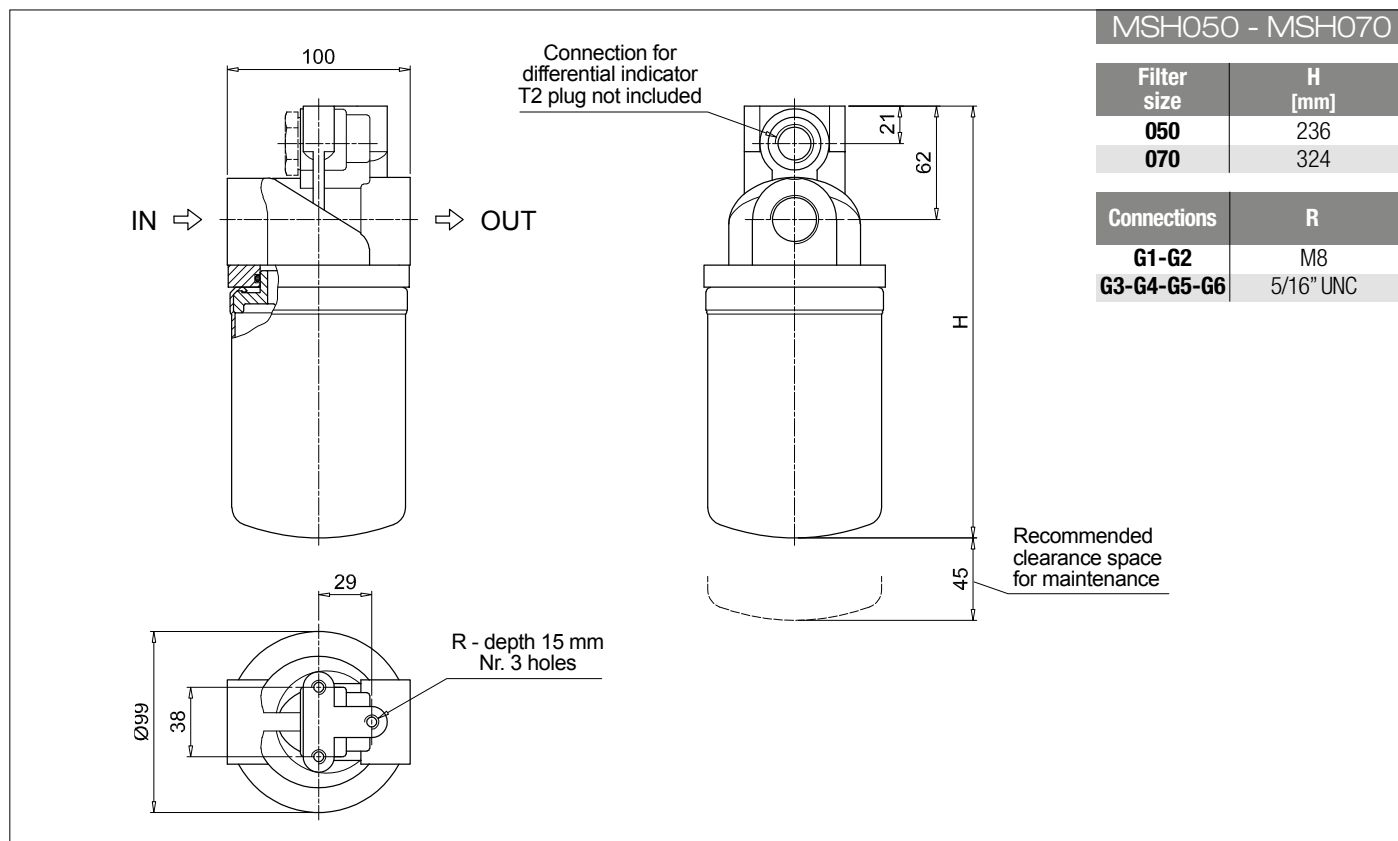
Series and size			Configuration example : MSH050					
MSH050 MSH070 MSH100 MSH150				B	A	G1	A10	P01
Bypass valve								
S Without bypass								
B 2.5 bar								
Seal								
A NBR								
Connections			MSH 050 - 070		MSH 100 - 150			
G1			G 1"		G 1 1/2"			
G2			G 3/4"		G 1 1/4"			
G3			1" NPT		1 1/2" NPT			
G4			3/4" NPT		1 1/4" NPT			
G5			SAE 16 - 1 5/16" - 12 UN		SAE 24 - 1 7/8" - 12 UN			
G6			SAE 12 - 1 1/16" - 12 UN		SAE 20 - 1 5/8" - 12 UN			
Filtration rating (filter media)								
A03 Inorganic microfiber 3 µm			M25 Wire mesh 25 µm					
A06 Inorganic microfiber 6 µm			M60 Wire mesh 60 µm					
A10 Inorganic microfiber 10 µm			M90 Wire mesh 90 µm					
A25 Inorganic microfiber 25 µm			P10 Resin impregnated paper 10 µm					
			P25 Resin impregnated paper 25 µm					
					Execution			
					P01		MP Filtri standard	

CARTRIDGE

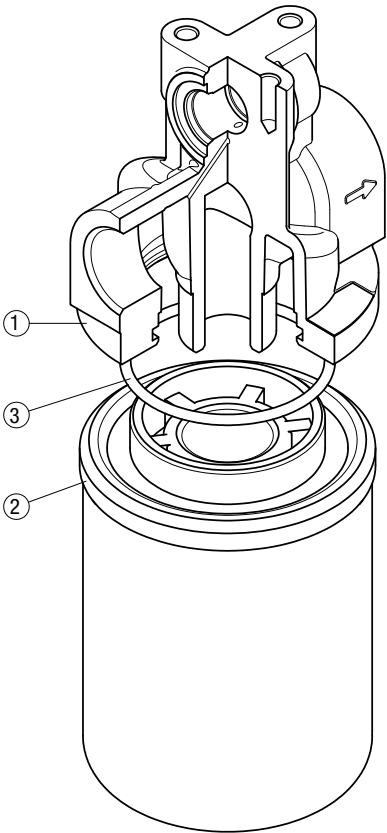
Cartridge series and size			Configuration example: CH050			
CH050 CH070 CH100 CH150				A10	A	P01
Filtration rating (filter media)						
A03 Inorganic microfiber 3 µm			M25 Wire mesh 25 µm			
A06 Inorganic microfiber 6 µm			M60 Wire mesh 60 µm			
A10 Inorganic microfiber 10 µm			M90 Wire mesh 90 µm			
A25 Inorganic microfiber 25 µm			P10 Resin impregnated paper 10 µm			
			P25 Resin impregnated paper 25 µm			
			Seal		Execution	
			A NBR		P01 MP Filtri standard	
					Pxx Customized	

ACCESSORIES

Differential indicators		page			page
DEA	Electrical differential indicator	317	DTA	Electronic differential indicator	320
DEM	Electrical differential indicator	317-318	DVA	Visual differential indicator	320
DLA	Electrical / visual differential indicator	318-319	DVM	Visual differential indicator	320
DLE	Electrical / visual differential indicator	319			
Additional features		page			
T2	Plug	321			



Order number for spare parts



Item:	Q.ty: 1 pc. 1	Q.ty: 1 pc. 2	Q.ty: 1 pc. 3
Filter series	Filter assembly	Cartridge	Seal code number
MSH 050-070	See order table	See order table	0-R 167 (ø 63.50 x 3.53)
MSH 100-150	See order table	See order table	0-R 4362 (ø 91.67 x 3.53)

Clogging indicators

Introduction

Filter elements are efficient only if their Dirt Holding Capacity is fully exploited. This is achieved by using filter housings equipped with clogging indicators.

These devices trip when the clogging of the filter element causes an increase in pressure drop across the filter element.

The indicator is set to alarm before the element becomes fully clogged.

MP Filtri can supply indicators of the following designs:

- Vacuum switches and gauges
- Pressure switches and gauges
- Differential pressure indicators

These type of devices can be provided with a visual, electrical or both signals.

Barometric indicators

Vacuum indicators

Differential indicators

Suitable indicator types

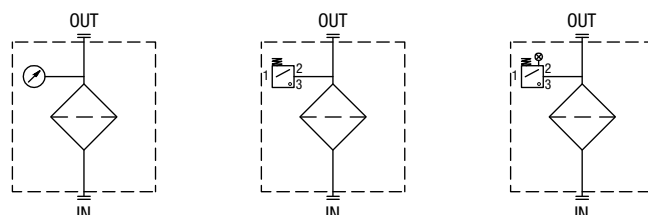
VACUUM INDICATORS

Vacuum indicators are used on the Suction line to check the efficiency of the filter element.

They measure the pressure downstream of the filter element.

Standard items are produced with R 1/4" EN 10226 connection.

Available products with R 1/8" EN 10226 to be fitted on MPS series.

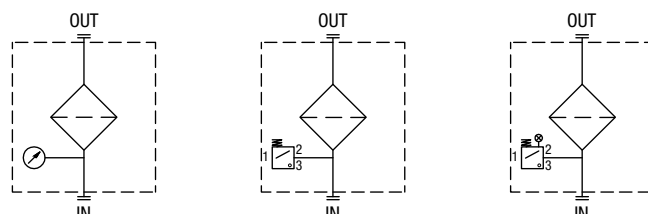


BAROMETRIC INDICATORS

Pressure indicators are used on the Return line to check the efficiency of the filter element.

They measure the pressure upstream of the filter element.

Standard items are produced with R 1/8" EN 10226 connection.



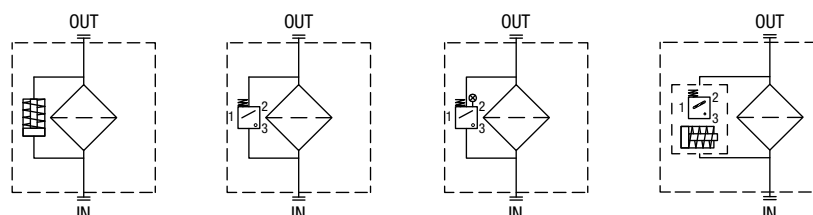
DIFFERENTIAL INDICATORS

Differential indicators are used on the Pressure line to check the efficiency of the filter element.

They measure the pressure upstream and downstream of the filter element (differential pressure).

Standard items are produced with special connection G 1/2" size.

Also available in Stainless Steel models.



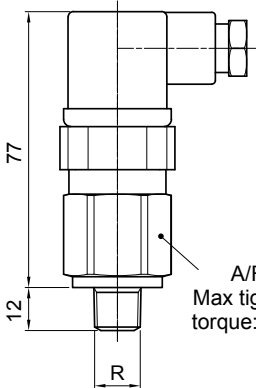




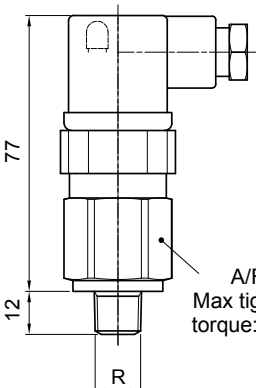
Quick reference guide



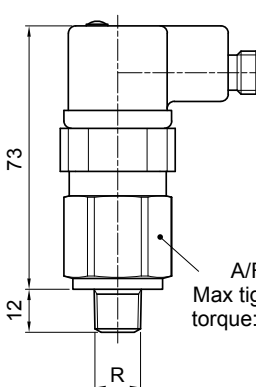
	Filter series	Visual indicator	Electrical indicator	Electrical / Visual indicator
Suction line	MPS 050 - 070 - 100 - 150 MPS 200 - 250 - 300 - 350	VVB16P01 VVS16P01	VEB21AA50P01	VLB21AA51P01 VLB21AA52P01 VLB21AA53P01 VLB21AA71P01
Return line	MPS 050 - 070 - 100 - 150 MPS 200 - 250 - 300 - 350	BVA14P01 BVR14P01 BVP20HP01 BVQ20HP01	BEA15HA50P01 BEM15HA41P01	BLA15HA51P01 BLA15HA52P01 BLA15HA53P01 BLA15HA71P01
In-line	MPS 051 - 071 - 101 - 151 MPS 301 - 351 MSH 050 - 070 - 100 - 150	DVA12xP01 DVM12xP01	DEA12xA50P01 DEM12xAxxP01	DLA12xA51P01 DLA12xA52P01 DLA12xA71P01 DLE12xA50P01 DLE12xF50P01

VACUUM INDICATORS

Dimensions

VE*50		Hydraulic symbol		Materials	
Electrical Vacuum Indicator				- Body: Brass - Base: Black Nylon - Contacts: Silver - Seal: NBR	
R	Ordering code	Electrical symbol		Technical data	
EN 10226 - R1/8"	VE B 21 A A 50 P01			- Vacuum setting: -0.21 bar $\pm$10% - Max working pressure: 10 bar - Proof pressure: 15 bar - Working temperature: From -25 °C to +80 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree of protection: IP65 according to EN 60529	
				Electrical data	
				- Electrical connection: EN 175301-803 - Resistive load: 5 A / 14 Vdc 4 A / 30 Vdc 5 A / 125 Vac 4 A / 250 Vac - Available Atex product: II 1GD Ex ia IIC Tx Ex ia IIIC Tx°C X  - CE certification	

VL*51 - VL*52 - VL*53		Hydraulic symbol		Materials	
Electrical/Visual Vacuum Indicator				- Body: Brass - Base: Transparent Nylon - Contacts: Brass - Nylon - Seal: NBR	
R	Ordering code	Electrical symbol		Technical data	
EN 10226 - R1/8"	VL B 21 A A xx P01			- Vacuum setting: -0.21 bar $\pm$10% - Max working pressure: 10 bar - Proof pressure: 15 bar - Working temperature: From -25 °C to +80 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree of protection: IP65 according to EN 60529	
				Electrical data	
				- Electrical connection: EN 175301-803 - Type: 51 52 53 - Lamps: 24 Vdc 110 Vdc 230 Vac - Resistive load: 1 A / 24 Vdc 1 A / 110 Vdc 1 A / 230 Vac	

VL*71		Hydraulic symbol		Materials	
Electrical/Visual Vacuum Indicator				- Body: Brass - Base: Black Nylon - Contacts: Silver - Seal: NBR	
Connections	Ordering code	Electrical symbol		Technical data	
EN 10226 - R1/8"	VL B 21 A A 71 P01			- Vacuum setting: -0.21 bar $\pm$10% - Max working pressure: 10 bar - Proof pressure: 15 bar - Working temperature: From -25 °C to +80 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree of protection: IP65 according to EN 60529	
				Electrical data	
				- Electrical connection: IEC 61076-2-101 D (M12) - Lamps: 24 Vdc - Resistive load: 0.4 A / 24 Vdc	

DESIGNATION & ORDERING CODE									
Series		Configuration example 1:							
VE Electrical vacuum indicator		VE	B	21	A	A	50	P01	
VL Electrical/Visual vacuum indicator		Configuration example 2:							
VV Vacuum gauge		VL	B	21	A	A	71	P01	
		Configuration example 3:							
		VV	S	16				P01	
Type VE - VL		Type VV							
B Connection EN 10226 - R1/8"		B Axial connection EN 10226 - R1/8"							
		S Radial connection EN 10226 - R1/8"							
Vacuum setting		VE	VL	VV					
16 -0.16 bar				•					
21 -0.21 bar		•	•						
Seals		VE	VL	VV					
A NBR		•	•						
Thermostat		VE	VL	VV					
A Without		•	•						
Electrical connections		VE	VL	VV					
50 Connection EN 175301-803		•							
51 Connection EN 175301-803, transparent base with lamps 24 Vdc			•						
52 Connection EN 175301-803, transparent base with lamps 110 Vdc			•						
53 Connection EN 175301-803, transparent base with lamps 230 Vdc			•						
71 Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc			•						
		Option							
		P01 MP Filtri standard							
		Pxx Customized							



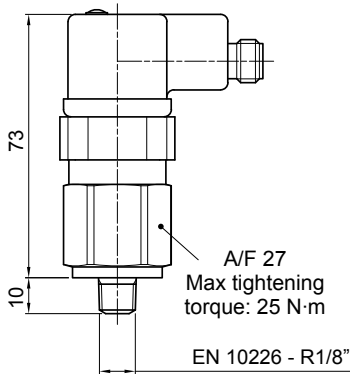
BAROMETRIC INDICATORS



Dimensions



BEA*50		Hydraulic symbol		Materials	
Electrical Pressure Indicator				- Body: Brass - Base: Black Nylon - Contacts: Silver - Seal: HNBR	
Settings	Ordering code	Electrical symbol		Technical data	
1.5 bar ±10%	BE A 15 HA 50 P01			- Max working pressure: 40 bar - Proof pressure: 60 bar - Working temperature: From -25 °C to +80 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree of protection: IP65 according to EN 60529	
2.0 bar ±10%	BE A 20 HA 50 P01			Electrical data	
				- Electrical connection: EN 175301-803 - Resistive load: 5 A / 14 Vdc 4 A / 30 Vdc 5 A / 125 Vac 4 A / 250 Vac - Available Atex product: II 1GD Ex ia IIC Tx Ex ia IIIC Tx°C X - CE certification	

BEM*41		Hydraulic symbol		Materials	
Electrical Pressure Indicator				- Body: Brass - Base: Black Nylon - Contacts: Silver - Seal: HNBR	
Settings	Ordering code	Electrical symbol		Technical data	
1.5 bar ±10%	BE M 15 HA 41 P01			- Max working pressure: 40 bar - Proof pressure: 60 bar - Working temperature: From -25 °C to +80 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree of protection: IP67 according to EN 60529	
2.0 bar ±10%	BE M 20 HA 41 P01			Electrical data	
				- Electrical connection: Four-core cable - Resistive load: 5 A / 14 Vdc 4 A / 30 Vdc 5 A / 125 Vac 4 A / 250 Vac - CE certification - On request this indicator can be provided with main connectors in use for wirings.	

BL*51 - BL*52 - BL*53		Hydraulic symbol		Materials	
Electrical/Visual Pressure Indicator				- Body: Brass - Base: Transparent Nylon - Contacts: Silver - Seal: HNBR	
Settings	Ordering code	Electrical symbol		Technical data	
1.5 bar ±10%	BL A 15 HA xx P01			- Max working pressure: 40 bar - Proof pressure: 60 bar - Working temperature: From -25 °C to +80 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree of protection: IP65 according to EN 60529	
2.0 bar ±10%	BL A 20 HA xx P01			Electrical data	
				- Electrical connection: EN 175301-803 - Type: 51 52 53 - Lamps: 24 Vdc 110 Vdc 230 Vac - Resistive load: 1 A / 24 Vdc 1 A / 110 Vdc 1 A / 230 Vac	

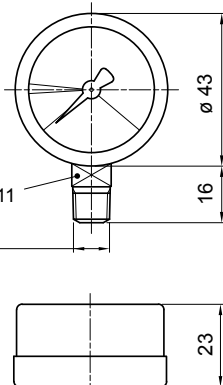
BL*71		Hydraulic symbol	Materials
Electrical/Visual Pressure Indicator			- Body: Brass - Base: Black Nylon - Contacts: Silver - Seal: HNBR
Settings	Ordering code	Electrical symbol	Technical data
1.5 bar ±10%	BL A 15 HA 71 P01		- Max working pressure: 40 bar - Proof pressure: 60 bar - Working temperature: From -25 °C to +80 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree of protection: IP65 according to EN 60529
2.0 bar ±10%	BL A 20 HA 71 P01		Electrical data
			- Electrical connection: IEC 61076-2-101 D (M12) - Lamps: 24 Vdc - Resistive load: 0.4 A / 24 Vdc

BVA	
Axial Pressure Gauge	
Settings	Ordering code
1.4 bar ±10%	BV A 14 P01
2.5 bar ±10%	BV A 25 P01
 EN 10226 - R1/8" 	



Hydraulic symbol	
	
Dial scale	
BV A 14 P01	
	
BV A 25 P01	
	

Materials	
- Case:	Painted Steel
- Window:	Transparent plastic
- Dial:	Painted Steel
- Pointer:	Painted Aluminium
- Pressure connection:	Brass
- Pressure element:	Bourdon tube Cu-alloy soft soldered

Technical data	
- Max working pressure:	Static: 7 bar Fluctuating: 6 bar Short time: 10 bar
- Working temperature:	From -40 °C to +60 °C
- Compatibility with fluids:	Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Accuracy:	Class 2.5 according to EN 13190
- Degree of protection:	IP31 according to EN 60529

BVR	
Radial Pressure Gauge	
Settings	Ordering code
1.4 bar ±10%	BV R 14 P01
2.5 bar ±10%	BV R 25 P01
	


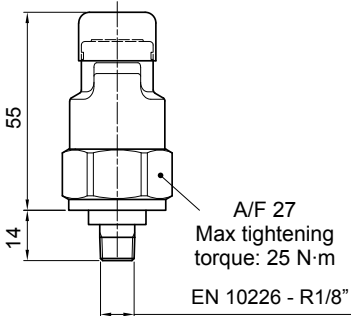



Hydraulic symbol

Dial scale
BV R 14 P01

BV R 25 P01


Materials	
- Case:	Painted Steel
- Window:	Transparent plastic
- Dial:	Painted Steel
- Pointer:	Painted Aluminium
- Pressure connection:	Brass
- Pressure element:	Bourdon tube Cu-alloy soft soldered
Technical data	
- Max working pressure:	Static: 7 bar Fluctuating: 6 bar Short time: 10 bar
- Working temperature:	From -40 °C to +60 °C
- Compatibility with fluids:	Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Accuracy:	Class 2.5 according to EN 13190
- Degree of protection:	IP31 according to EN 60529

BAROMETRIC INDICATORS

Dimensions

BVP - BVQ		Hydraulic symbol	Materials	
Visual Pressure Indicator				
Setting	Ordering code		- Body: Brass - Cover / internal parts: Nylon - Caps: VMQ - Seal: HNBR	
1.5 bar ±10%	BV P 15 H P01			
	BV Q 15 H P01			
2.0 bar ±10%	BV P 20 H P01			
	BV Q 20 H P01			
		Technical data		
		- Reset: BVP - Automatic reset BVQ - Manual reset - Max working pressure: 10 bar - Proof pressure: 15 bar - Working temperature: From -25 °C to +80 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree of protection: IP45 according to EN 60529		
Signals		 Absence of pressure (no indicator)	 Presence of pressure (green button rises gradually)	 Clogged filter element (red button risen)

DESIGNATION & ORDERING CODE

Series				Configuration example 1:						
BE Electrical pressure indicator				BE	M	15	H	A	41	P01
BL Electrical/Visual pressure indicator				Configuration example 2:						
				BL	A	20	H	A	71	P01
BV Visual pressure indicator				Configuration example 3:						
				BV	R	14				P01
				Configuration example 4:						
				BV	P	20	H			P01

Type	BE	BL	BV				
A Standard type	•	•	A	Axial connection pressure gauge			
M With wired electrical connection	•		R	Radial connection pressure gauge			
			P	Visual indicator with automatic reset			
			Q	Visual indicator with manual reset			




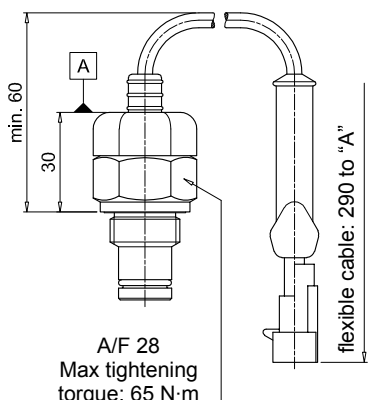


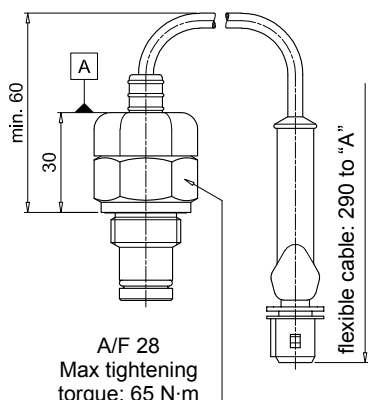


Pressure setting	BEA-BEM	BLA	BVA-BVR	BVP-BVQ
14 1.4 bar			•	
15 1.5 bar	•	•		
20 2 bar	•	•		•
25 2.5 bar			•	

Seals	BE	BLA	BVA-BVR	BVP-BVQ
H HNBR	•	•		•

Thermostat	BEA-BEM	BLA	BV	
A Without	•	•		

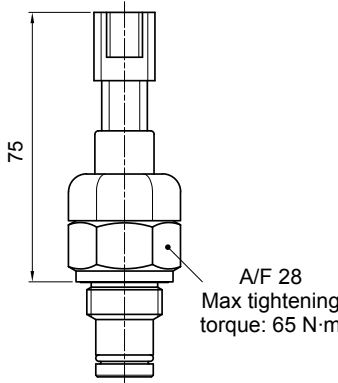
Electrical connections				BEA	BEM	BL	BV
10 Connection AMP Superseal series 1.5							
30 Connection Deutsch DT-04-2-P							
41 Connection via four-core cable					•		
50 Connection EN 175301-803				•			
51 Connection EN 175301-803, transparent base with lamps 24 Vdc						•	
52 Connection EN 175301-803, transparent base with lamps 110 Vdc						•	
53 Connection EN 175301-803, transparent base with lamps 230 Vdc						•	
71 Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc						•	

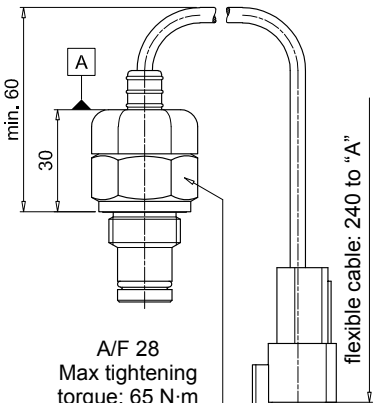
Option	
P01	MP Filtri standard
Pxx	Customized


DEA*50 Electrical Differential Indicator <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DE A 12 x A 50 P01</td></tr><tr><td>2.0 bar ±10%</td><td>DE A 20 x A 50 P01</td></tr></table>  A/F 30 Max tightening torque: 65 N·m		Settings	Ordering code	1.2 bar ±10%	DE A 12 x A 50 P01	2.0 bar ±10%	DE A 20 x A 50 P01	Hydraulic symbol  Electrical symbol 	Materials - Body: - Base: - Contacts: - Seal: Brass Black Nylon Silver HNBR - FPM Technical data - Max working pressure: - Proof pressure: - Burst pressure: - Working temperature: - Compatibility with fluids: - Degree protection: 420 bar 630 bar 1260 bar From -25 °C to +110 °C Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 IP66 according to EN 60529 IP69K according to ISO 20653 Electrical data - Electrical connection: - Resistive load: EN 175301-803 0.2 A / 115 Vdc
Settings	Ordering code								
1.2 bar ±10%	DE A 12 x A 50 P01								
2.0 bar ±10%	DE A 20 x A 50 P01								
DEM*10 Electrical Differential Indicator <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DE M 12 x x 10 P01</td></tr><tr><td>2.0 bar ±10%</td><td>DE M 20 x x 10 P01</td></tr></table>  A/F 28 Max tightening torque: 65 N·m		Settings	Ordering code	1.2 bar ±10%	DE M 12 x x 10 P01	2.0 bar ±10%	DE M 20 x x 10 P01	Hydraulic symbol  Electrical symbol 	Materials - Body: - Base: - Contacts: - Seal: Brass Black Nylon Silver HNBR - FPM Technical data - Max working pressure: - Proof pressure: - Burst pressure: - Working temperature: - Compatibility with fluids: - Degree protection: 420 bar 630 bar 1260 bar From -25 °C to +110 °C Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 IP66 according to EN 60529 Electrical data - Electrical connection: - Resistive load: - Switching type: - Thermal lockout: AMP Superseal series 1.5 0.2 A / 115 Vdc Normally open contacts (NC on request) Normally open up to 30 °C (option "F")
Settings	Ordering code								
1.2 bar ±10%	DE M 12 x x 10 P01								
2.0 bar ±10%	DE M 20 x x 10 P01								
DEM*20 Electrical Differential Indicator <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DE M 12 x x 20 P01</td></tr><tr><td>2.0 bar ±10%</td><td>DE M 20 x x 20 P01</td></tr></table>  A/F 28 Max tightening torque: 65 N·m		Settings	Ordering code	1.2 bar ±10%	DE M 12 x x 20 P01	2.0 bar ±10%	DE M 20 x x 20 P01	Hydraulic symbol  Electrical symbol 	Materials - Body: - Base: - Contacts: - Seal: Brass Black Nylon Silver HNBR - FPM Technical data - Max working pressure: - Proof pressure: - Burst pressure: - Working temperature: - Compatibility with fluids: - Degree protection: 420 bar 630 bar 1260 bar From -25 °C to +110 °C Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 IP66 according to EN 60529 Electrical data - Electrical connection: - Resistive load: - Switching type: - Thermal lockout: AMP Time junior 0.2 A / 115 Vdc Normally open contacts (NC on request) Normally open up to 30 °C (option "F")
Settings	Ordering code								
1.2 bar ±10%	DE M 12 x x 20 P01								
2.0 bar ±10%	DE M 20 x x 20 P01								



DIFFERENTIAL INDICATORS

Dimensions



DEM*30	
Electrical Differential Indicator	
Settings	Ordering code
1.2 bar ±10%	DE M 12 x x 30 P01
2.0 bar ±10%	DE M 20 x x 30 P01
	

DEM*35	
Electrical Differential Indicator	
Settings	Ordering code
1.2 bar ±10%	DE M 12 x x 35 P01
2.0 bar ±10%	DE M 20 x x 35 P01
	



DLA*51 - DLA*52	
Electrical/Visual Differential Indicator	
Settings	Ordering code
1.2 bar ±10%	DL A 12 x A xx P01
2.0 bar ±10%	DL A 20 x A xx P01
	

Hydraulic symbol	
	
Electrical symbol	
	




Materials	
- Body:	Brass
- Base:	Black Nylon
- Contacts:	Silver
- Seal:	HNBR - FPM
Technical data	
- Max working pressure:	420 bar
- Proof pressure:	630 bar
- Burst pressure:	1260 bar
- Working temperature:	From -25 °C to +110 °C
- Compatibility with fluids:	Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree protection:	IP66 according to EN 60529
Electrical data	
- Electrical connection:	Deutsch DT-04-2-P
- Resistive load:	0.2 A / 115 Vdc
- Switching type:	Normally open contacts (NC on request)
- Thermal lockout:	Normally open up to 30 °C (option "F")


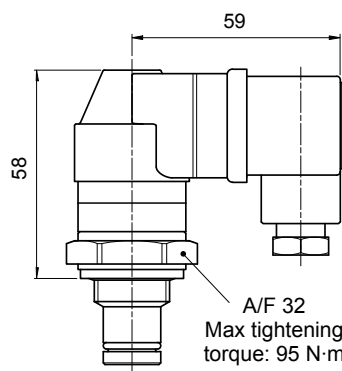
Hydraulic symbol	
	
Electrical symbol	
	


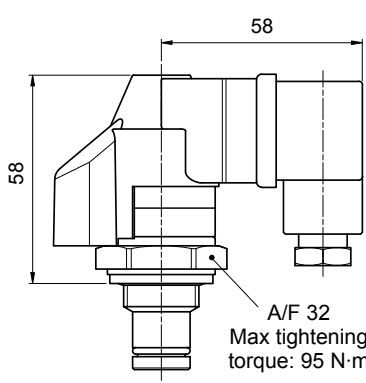
Materials	
- Body:	Brass
- Base:	Black Nylon
- Contacts:	Silver
- Seal:	HNBR - FPM
Technical data	
- Max working pressure:	420 bar
- Proof pressure:	630 bar
- Burst pressure:	1260 bar
- Working temperature:	From -25 °C to +110 °C
- Compatibility with fluids:	Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree protection:	IP66 according to EN 60529
Electrical data	
- Electrical connection:	Deutsch DT-04-3-P
- Resistive load:	0.2 A / 115 Vdc
- Switching type:	SPDT contact
- Thermal lockout:	Normally open up to 30 °C (option "F")

Hydraulic symbol	
	
Electrical symbol	
	

Materials	
- Body:	Brass
- Base:	Transparent Nylon
- Contacts:	Silver
- Seal:	HNBR - FPM
Technical data	
- Max working pressure:	420 bar
- Proof pressure:	630 bar
- Burst pressure:	1260 bar
- Working temperature:	From -25 °C to +110 °C
- Compatibility with fluids:	Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree protection:	IP66 according to EN 60529 IP69K according to ISO 20653
Electrical data	
- Electrical connection:	EN 175301-803
- Type	51 52
- Lamps	24 Vdc 110 Vdc
- Resistive load:	1 A / 24 Vdc 1 A / 110 Vdc



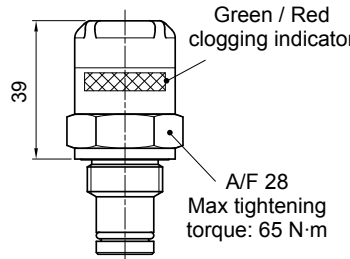



DLA*71		Hydraulic symbol	Materials
Electrical/Visual Differential Indicator			- Body: Brass - Base: Black Nylon - Contacts: Silver - Seal: HNBR - FPM
Settings	Ordering code	Electrical symbol	Technical data
1.2 bar $\pm 10\%$	DL A 12 x A 71 P01		- Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree protection: IP65 according to EN 60529 IP69K according to ISO 20653
2.0 bar $\pm 10\%$	DL A 20 x A 71 P01		Electrical data
		- Electrical connection: IEC 61076-2-101 D (M12) - Lamps: 24 Vdc - Resistive load: 0.4 A / 24 Vdc	

DLE*A50		Hydraulic symbol	Materials
Electrical/Visual Differential Indicator			
Settings	Ordering code		- Body: Brass - Base: Black Nylon - Contacts: Silver - Seal: HNBR - FPM
1.2 bar ±10%	DL E 12 x A 50 P01		
2.0 bar ±10%	DL E 20 x A 50 P01		
		Technical data	
		- Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943	
		- Degree protection: IP65 according to EN 60529	
		Electrical data	
		- Electrical connections: EN 175301-803 - Resistive load: 5 A / 250 Vac - Available the connector with lamps	


DLE*F50		Hydraulic symbol	Materials
Electrical/Visual Differential Indicator			- Body: Brass - Base: Black Nylon - Contacts: Silver - Seal: HNBR - FPM
Settings	Ordering code	Technical data	
1.2 bar $\pm 10\%$	DL E 12 x F 50 P01	- Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree protection: IP65 according to EN 60529	
2.0 bar $\pm 10\%$	DL E 20 x F 50 P01	Electrical data	
		- Electrical connections: EN 175301-803 - Resistive load: 5 A / 250 Vac - Thermal lockout setting: +30 °C	

DIFFERENTIAL INDICATORS


Dimensions

DTA*70 Electronic Differential Indicator <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DT A 12 x 70 P01</td></tr><tr><td>2.0 bar ±10%</td><td>DT A 20 x 70 P01</td></tr></table> 		Settings	Ordering code	1.2 bar ±10%	DT A 12 x 70 P01	2.0 bar ±10%	DT A 20 x 70 P01	Hydraulic symbol  Electrical symbol <table><tr><td>①</td><td>○</td><td>○</td><td>+24 Vdc</td></tr><tr><td>②</td><td>○</td><td>○</td><td>4 ÷ 20 mA</td></tr><tr><td>③</td><td>○</td><td>○</td><td>75% - N.O. Digital output</td></tr><tr><td>④</td><td>○</td><td>○</td><td>100% - N.O. Digital output</td></tr><tr><td>⑤</td><td>○</td><td>○</td><td>0 Vdc</td></tr></table>	①	○	○	+24 Vdc	②	○	○	4 ÷ 20 mA	③	○	○	75% - N.O. Digital output	④	○	○	100% - N.O. Digital output	⑤	○	○	0 Vdc	Materials - Body: - Internal parts: - Contacts: - Seal: Brass Brass - Nylon Silver HNBR - FPM Technical data - Max working pressure: - Proof pressure: - Burst pressure: - Compatibility with fluids: - Degree protection: 420 bar 630 bar 1260 bar Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 IP67 according to EN 60529 Electrical data - Electrical connection: - Power supply: - Analogue output: - Thermal lockout: IEC 61076-2-101 D (M12) 24 Vdc From 4 to 20 mA 30 °C (all output signals stalled up to 30 °C)
Settings	Ordering code																												
1.2 bar ±10%	DT A 12 x 70 P01																												
2.0 bar ±10%	DT A 20 x 70 P01																												
①	○	○	+24 Vdc																										
②	○	○	4 ÷ 20 mA																										
③	○	○	75% - N.O. Digital output																										
④	○	○	100% - N.O. Digital output																										
⑤	○	○	0 Vdc																										
DVA Visual Differential Indicator <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DV A 12 x P01</td></tr><tr><td>2.0 bar ±10%</td><td>DV A 20 x P01</td></tr></table> 		Settings	Ordering code	1.2 bar ±10%	DV A 12 x P01	2.0 bar ±10%	DV A 20 x P01	Hydraulic symbol 	Materials - Body: - Internal parts: - Contacts: - Seal: Brass Brass - Nylon Silver HNBR - FPM Technical data - Reset: - Max working pressure: - Proof pressure: - Burst pressure: - Working temperature: - Compatibility with fluids: - Degree protection: Automatic reset 420 bar 630 bar 1260 bar From -25 °C to +110 °C Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 IP65 according to EN 60529																				
Settings	Ordering code																												
1.2 bar ±10%	DV A 12 x P01																												
2.0 bar ±10%	DV A 20 x P01																												
DVM Visual Differential Indicator <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DV M 12 x P01</td></tr><tr><td>2.0 bar ±10%</td><td>DV M 20 x P01</td></tr></table> 		Settings	Ordering code	1.2 bar ±10%	DV M 12 x P01	2.0 bar ±10%	DV M 20 x P01	Hydraulic symbol 	Materials - Body: - Internal parts: - Contacts: - Seal: Brass Brass - Nylon Silver HNBR - FPM Technical data - Reset: - Max working pressure: - Proof pressure: - Burst pressure: - Working temperature: - Compatibility with fluids: - Degree protection: Manual reset 420 bar 630 bar 1260 bar From -25 °C to +110 °C Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 IP65 according to EN 60529																				
Settings	Ordering code																												
1.2 bar ±10%	DV M 12 x P01																												
2.0 bar ±10%	DV M 20 x P01																												

T2	
Indicator plug	
Seal	Ordering code
HNBR	T2 H
FPM	T2 V



A/F 30
Max tightening torque: 50 N·m



Materials

- Body: Phosphatized steel
- Seal: HNBR / FPM

DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATORS											
Series				Configuration example 1:							
DE Electrical differential indicator				Configuration example 2:							
DL Electrical/Visual differential indicator				Configuration example 3:							
DT Electronic differential indicator				Configuration example 4:							
DV Visual differential indicator											
Type	DE	DL	DT	DV							
A Standard type	•	•	•	A With automatic reset							
M With wired electrical connection	•			M With manual reset							
E For high power supply		•									
Pressure setting											
12 1.2 bar											
20 2.0 bar											
Seals											
H HNBR											
V FPM											
Thermostat				DEA	DEM	DLA	DLE	DT	DV		
A Without				•	•	•	•				
F With thermostat					•		•	•			
Electrical connections				DEA	DEM	DLA	DLE	DT	DV		
10 Connection AMP Superseal series 1.5					•						
20 Connection AMP Timer Junior					•						
30 Connection Deutsch DT-04-2-P					•						
35 Connection Deutsch DT-04-3-P					•						
50 Connection EN 175301-803				•			•				
51 Connection EN 175301-803, transparent base with lamps 24 Vdc							•				
52 Connection EN 175301-803, transparent base with lamps 110 Vdc							•				
70 Connection IEC 61076-2-101 D (M12)								•			
71 Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc						•					
Option											
P01		MP Filtri standard									
Pxx		Customized									

DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATOR PLUG									
Series		Configuration example							
T2 Indicator plug		T2		H					
Seals									
H HNBR									
V FPM									

Clogging indicators are devices that check the life time of the filter elements. They measure the pressure drop through the filter element directly connected to the filter housing.

These devices trip when the clogging of the filter element causes a pressure drop increasing across the filter element.

Filter elements are efficient only if their Dirt Holding Capacity is fully exploited.

This is achieved by using filter housings equipped with clogging indicators.

The indicator is set to alarm before the element becomes fully clogged.

MP Filtri can supply indicators of the following designs:

- Vacuum switches and gauges**
- Pressure switches and gauges**
- Differential pressure indicators**

These type of devices can be provided with a visual, electrical or both signals.

The electronic differential pressure clogging indicator is also available.

It provides both analogical 4-20 mA output and digital warning (75% of clogging) and alarm (clogging) outputs.

Clogging Indicators



Clogging indicators



Suitable indicator types




VACUUM INDICATORS

Vacuum indicators are used on the Suction line to check the efficiency of the filter element.

They measure the pressure downstream of the filter element.

Standard items are produced with R 1/4" EN 10226 connection.

Available products with R 1/8" EN 10226 to be fitted on MPS series.






BAROMETRIC INDICATORS

Pressure indicators are used on the Return line to check the efficiency of the filter element.

They measure the pressure upstream of the filter element.

Standard items are produced with R 1/8" EN 10226 connection.







DIFFERENTIAL INDICATORS

Differential indicators are used on the Pressure line to check the efficiency of the filter element.

They measure the pressure upstream and downstream of the filter element (differential pressure).

Standard items are produced with special connection G 1/2" size.

Also available in Stainless Steel models.



Filter family	Filter series	Electrical indicator	Electrical / Visual indicator	Electronic indicator	Visual indicator
SUCTION FILTERS	ELIXIR® SFEX060-080-110-160	VEB21AA50P01	VLB21AA51P01 VLB21AA52P01 VLB21AA53P01 VLB21AA71P01		VVB16P01 VVS16P01
	SF2 250 - 350 SF2 500 - 501 - 503 - 504 - 505 SF2 510 - 535 - 540	VEA21AA50P01	VLA21AA51P01 VLA21AA52P01 VLA21AA53P01 VLA21AA71P01		VVA16P01 VVR16P01
RETURN FILTERS	With bypass valve ELIXIR® RFEX060-080-110-160	BEA15HA50P01 BEM15HA41P01	BLA15HA51P01 BLA15HA52P01 BLA15HA53P01 BLA15HA71P01		BVA14P01 BVR14P01 BVP15HP01 BVQ15HP01
	Without bypass valve ELIXIR® RFEX060-080-110-160	BEA20HA50P01 BEM20HA41P01	BLA20HA51P01 BLA20HA52P01 BLA20HA53P01 BLA20HA71P01		BVA25P01 BVR25P01 BVP20HP01 BVQ20HP01
	With bypass valve MPFX-MPTX-MPF-MPT - bypass 1.75 bar MPH - bypass 1.75 bar RF2250 - RF2350 - bypass 1.75 bar	BEA15HA50P01 BEM15HA41P01	BLA15HA51P01 BLA15HA52P01 BLA15HA53P01 BLA15HA71P01		BVA14P01 BVR14P01 BVP15HP01 BVQ15HP01
	With bypass valve MPFX-MPTX-MPF-MPT - bypass 3 bar MPH - bypass 2.5 bar FRI 255 RF2250 - RF2350 - bypass 3 bar	BEA20HA50P01 BEM20HA41P01	BLA20HA51P01 BLA20HA52P01 BLA20HA53P01 BLA20HA71P01		BVA25P01 BVR25P01 BVP20HP01 BVQ20HP01
	MPLX FRI 025 - 040 - 100 - 250 - 630 - 850	DEA20xA50P01 DEM20xA10P01 DEM20xA20P01 DEM20xA30P01 DEM20xA35P01	DLA20xA51P01 DLA20xA52P01 DLA20xA71P01 DLE20xA50P01 DLE20xF50P01	DTA20xF70P01	DVA20xP01 DVM20xP01
RETURN / SUCTION FILTERS	Suction line MRSX 116 - 165 - 166	VEB21AA50P01	VLB21AA51P01 VLB21AA52P01 VLB21AA53P01 VLB21AA71P01		VVB16P01 VVS16P01
	Return line MRSX 116 - 165 - 166 LMP 124 MULTIPORT	BEA25HA50P01 BEM25HA41P01 BET25HF10P01 BET25HF30P01 BET25HF50P01	BLA25HA51P01 BLA25HA52P01 BLA25HA53P01 BLA25HA71P01		BVA25P01 BVR25P01 BVP20HP01 BVQ20HP01
SPIN-ON FILTERS	Suction line MPS 050 - 070 - 100 - 150 MPS 200 - 250 - 300 - 350	VEB21AA50P01	VLB21AA51P01 VLB21AA52P01 VLB21AA53P01 VLB21AA71P01		VVB16P01 VVS16P01
	Return line MPS 050 - 070 - 100 - 150 MPS 200 - 250 - 300 - 350	BEA15HA50P01 BEM15HA41P01	BLA15HA51P01 BLA15HA52P01 BLA15HA53P01 BLA15HA71P01		BVA14P01 BVR14P01 BVP20HP01 BVQ20HP01
	In-line MPS 051 - 071 - 101 - 151 MPS 301 - 351 MSH 050 - 070 - 100 - 150	DEA12xA50P01 DEM12xAxxP01	DLA12xA51P01 DLA12xA52P01 DLA12xA71P01 DLE12xA50P01 DLE12xF50P01 DLE20xF50P01 DLE20xF50P01	DTA12xA70P01 DTA12xF70P01 DTA20xA70P01 DTA20xF70P01	DVA12xP01 DVM12xP01

Filter family	Filter series	Electrical indicator	Electrical / Visual indicator	Electronic indicator	Visual indicator	Hazardous area electronic indicator 
LOW & MEDIUM PRESSURE FILTERS	With bypass valve  LFEX060-080-110-160	DES25HA10P01 DES25HA30P01 DES25HA80P01			DVS25HP01	
	Without bypass valve  LFEX060-080-110-160	DES40HA10P01 DES40HA30P01 DES40HA80P01			DVS40HP01	
	LMP 110 - 112 - 116 - 118 - 119 MULTIPORT LMP 120 - 122 - 123 MULTIPORT LMP 210 - 211 - LDP				DVS25HP01 DVS40HP01	
	With bypass valve LMP 400 - 401 & 430 - 431 LMP 900 - 901 LMP 902 - 903 LMP 950 - 951 LMP 952 - 953 - 954 LMD 211 - 400 - 401 - 431 - 951 - LDD	DEA20xA50P01 DEM20xAxxP01	DLA20xA51P01 DLA20xA52P01 DLA20xA71P01 DLE20xA50P01 DLE20xF50P01	DTA20xF70P01	DVA20xP01 DVM20xP01	
	Without bypass valve LMP 110 - 112 - 116 - 118 - 119 MULTIPORT LMP 120 - 122 - 123 MULTIPORT LMP 210 - 211 - LDP LMP 400 - 401 & 430 - 431 LMP 900 - 901 LMP 902 - 903 LMP 950 - 951 LMP 952 - 953 - 954 LMD 211 - 400 - 401 - 431 - 951 - LDD	DEA50xA50P01 DEM50xAxxP01	DLA50xA51P01 DLA50xA52P01 DLA50xA71P01 DLE50xA50P01 DLE50xF50P01	DTA50xF70P01	DVA50xP01 DVM50xP01	
	With bypass valve FMP 039 - 065 - 135 - 320 FHP 010 - 011 - 065 - 135 - 350 - 500 FMM 050 - 150 FHA 051 FHM 006 - 007 - 010 - 050 - 065 - 135 - 320 - 500 FHB 050 - 065 - 135 - 320 FHF 325 FHD 021 - 051 - 326 - 333	DEA50xA50P01 DEM50xAxxP01	DLA50xA51P01 DLA50xA52P01 DLA50xA71P01 DLE50xA50P01 DLE50xF50P01	DTA50xF70P01	DVA50xP01 DVM50xP01	DEH50xA48P01 DEH50xA49P01 DEH50xA70P01 DEH70xA48P01 DEH70xA49P01 DEH70xA70P01
	Without bypass valve FMP 039 - 065 - 135 - 320 FHP 010 - 011 - 065 - 135 - 350 - 500 FMM 050 - 150 FHA 051 FHM 006 - 007 - 010 - 050 - 065 - 135 - 320 - 500 FHB 050 - 065 - 135 - 320 FHF 325 FHD 021 - 051 - 326 - 333	DEA70xA50P01 DEM70xAxxP01 DEA95xA50P01 DEM95xAxxP01	DLA70xA51P01 DLA70xA52P01 DLA70xA71P01 DLE70xA50P01 DLE70xF50P01 DLA95xA51P01 DLA95xA52P01 DLE95xA50P01 DLE95xF50P01	DTA70xF70P01 DTA95xF70P01	DVA70xP01 DVM70xP01 DVA95xP01 DVM95xP01	DEH50xA48P01 DEH50xA49P01 DEH50xA70P01 DEH70xA48P01 DEH70xA49P01 DEH70xA70P01
	With bypass valve FZH 010 - 011 - 039 FZP 039 - 136 FZX 011 FZB 039 FZM 039 FZD 051	DEX50xA50P01	DLX50xA51P01 DLX50xA52P01		DVX50xP01 DVG50xP01	DEH50xA48P01 DEH50xA49P01 DEH50xA70P01 DEH70xA48P01 DEH70xA49P01 DEH70xA70P01
	Without bypass valve FZH 010 - 011 - 039 FZP 039 - 136 FZB 039 FZM 039 FZD 010 - 021 - 051	DEX70xA50P01 DEX95xA50P01	DLX70xA51P01 DLX70xA52P01 DLX95xA51P01		DVX70xP01 DVG70xP01 DVG95xP01	DEH50xA48P01 DEH50xA49P01 DEH50xA70P01 DEH70xA48P01 DEH70xA49P01 DEH70xA70P01

All data, details and words contained in this publication are provided for information purposes only.
MP Filtri reserves the right to make modifications to the models and versions of the described products at any time
for both technical and / or commercial reasons.
The colors and the pictures of the products are purely indicative.
Any reproduction, partial or total, of this document is strictly forbidden.
All rights are strictly reserved.



WORLDWIDE NETWORK

HEADQUARTERS

MP Filtri S.p.A.
Pessano con Bornago
Milano
Italy
sales@mpfiltri.com

BRANCH OFFICES

ITALFILTRI LLC
Moscow
Russia
mpfiltrirussia@yahoo.com

MP Filtri Canada Inc.
Concord, Ontario
Canada
sales@mpfiltricanada.com

MP Filtri France SAS
Lyon
AURA
France
sales@mpfiltrifrance.com

MP Filtri Germany GmbH
St. Ingbert
Germany
sales@mpfiltri.de

MP Filtri India Pvt. Ltd.
Bangalore
India
sales@mpfiltri.co.in

MP Filtri (Shanghai) Co., Ltd.
Shanghai
P.R. China
sales@mpfiltrishanghai.com

MP Filtri U.K. Ltd.
Bourton on the Water
Gloucestershire
United Kingdom
sales@mpfiltri.co.uk

MP Filtri U.S.A. Inc.
Quakertown, PA
U.S.A.
sales@mpfiltriusa.com

PASSION TO PERFORM



mpfiltri.com